



Technical Data

Blank Plate

Brief product description:


A sleek and slim design with softly rounded corners will compliment any interior décor - suitable for domestic or commercial installations.

Features:

- Fixed integrated plastic gasket to protect metal edges from moisture
- Stylish modern profile
- Available in 4 metal finishes
- Colour matched fixing screws

Product Images

Black Nickel

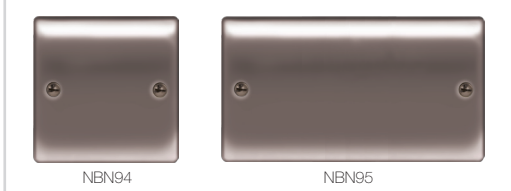

NBN94

NBN95


Polished Chrome



NPC94

NPC95


Polished Brass

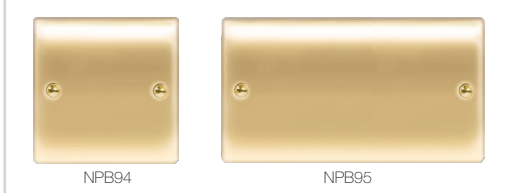

NPB94

NPB95

Brushed Steel

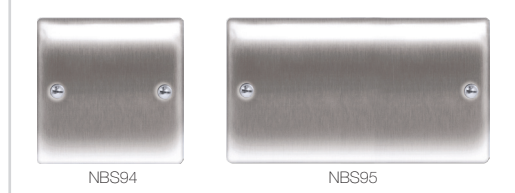


NBS94

NBS95


Technical Specifications

Standard(s)	BS 5733
RoHS Directive	No
WEEE Directive	No
Fixing Centres	60.3mm (Nx94 Product) 120.6mm (Nx95 Product)
Size	86mm x 86mm x 6.9mm (Nx94 Product) 146.5mm x 86mm x 6.9mm (Nx95 Product)


Line Diagrams



Nxx94



Nxx95



Blank Plate

Weights & Dimensions

Cat No.	Description	Pack Quantity			Dimension (W x L x H) cm			Weight (g)			CMB (m ³)
		Each	Inner Box	Outer Box	Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
Nxx94	1G Blank Plate	1	5	50		29 x 16 x 12	61 x 32.8 x 30			6100	0.060024
Nxx95	2G Blank Plate	1	5	50		24.5 x 18 x 12	61 x 36.8 x 25.5			9430	0.0572424

Packaging Information

Cat No.	Description	Barcode			Cat No.	Description	Barcode		
		Individual	Inner Box	Outer Box			Individual	Inner Box	Outer Box
NBS94	1G Blank Plate	5050765018807	5050765019170	5050765019545	NBS95	2G Blank Plate	5050765018814	5050765019187	5050765019552
NPC94	1G Blank Plate	5050765019910	5050765020282	5050765020657	NPC95	2G Blank Plate	5050765019927	5050765020299	5050765020664
NPB94	1G Blank Plate	5050765021029	5050765021395	5050765021760	NPB95	2G Blank Plate	5050765021036	5050765021401	5050765021777
NBN94	1G Blank Plate	5050765023115	5050765023481	5050765023856	NBN95	2G Blank Plate	5050765023122	5050765023498	5050765023863

Installation Information

Safety Warning

Before use please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply **is switched off at the mains**. Either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IEE regulations (BS 7671).

Wire Identification – Twin & Earth Cable

EARTH = Green/Yellow Slewing

NEUTRAL = Black (pre Apr 04) / Blue (after Apr 04)

LIVE = Red (pre Apr 04) / Brown (after Apr 04)



Technical Helpline: 0845 194 7584

If in doubt consult a competent electrician.

The ends of the individual conductors should have the insulation removed by approx. 12mm. Any bare earth conductors should be sleeved to within 12mm of the ends. (These details are for general information only and conductor lengths may need to be trimmed in certain installations).

Decorative Front Plate Fixing

Fixing method varies depending on which product range is supplied. Always ensure wall surface is reasonably flat and smooth, with no bumps or projections.

Metal Front plates WITH screw fixing holes. These products comprise main unit with integral front plate and rear gasket. Fix unit to back box using two fixing screws supplied.

Front plates WITHOUT screw fixing holes. These products comprise main unit with integral gasket, and front plate as separate item. Fix unit to back box using two fixing screws supplied.

Clip front plate onto main assembly, ensuring screwdriver notch is located bottom right hand corner. To remove plate, place medium size flat bladed screwdriver in notch and lever off against gasket.

For all Decorative Plates - It is essential the gasket is fitted between product and wall, to reduce possibility of discolouration of front plate edges due to natural moisture in some wall finishes.

To keep the finish of this product, wipe over with soft cloth periodically.

All Decorative products MUST have an earth connection between the front-plate and back box