


Plateswitches

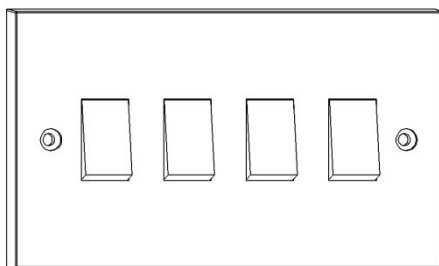

Description

This moulded white wiring range is suited to new houses and retrofit installations, as well as commercial environments.

Features

- All plate switched are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- 10-year guarantee

Range

10A 1g 1w	V1202
10A 1g 2w	V1203
10A 2g 2w	V1204
10A 3g 2w	V1205
10A 4g 2w	V1244
10A 6g 2w	V1245
Intermediate	V1246
Press switch marked "PRESS"	V1249
Press switch marked with bell symbol	V1249B
3 pole fan isolator	V1247

Technical Specification

Voltage rating	250Vac
Current Rating	10A
	X rated
Contact gap	3mm
Plate Thickness	9mm

No user serviceable parts

Standards

- BS EN 60669-1:2000

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1-3g	DB152	DB2540	V1220/E
4-6g	DB163	DB2541	V1223

Terminal Capacity

	1mm ²	1.5mm ²	2.5mm ²	4mm ²
L	5	4	2	1