



CT1008



CT1016




SP1016

Lighting Management Boxes

- CT1016** 20A 16 Way Lighting Management Box
- CT1008** 20A 8 Way Distribution Box
- SP1016** Mounting Tray For CT1016 & CT1008

Standards: BS 8488, BS 5733, BS EN 61535

Dimensions: CT1016: 269mm x 264mm x 69mm CT1008: 264mm x 114mm x 70mm

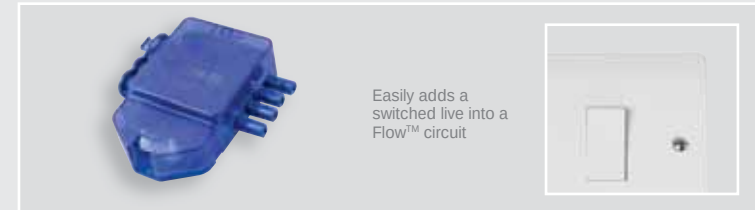

CT2300

Easily adds a switched live into a Flow™ circuit



CT300



CT350




CT355

3 Pole Flow™ Connectors

- CT1300** 250V 20A 3 Pole Flow™ Switch Adaptor
- CT2300** 250V 20A 4 Pole Flow™ Switch Adaptor with pre-wired earth and neutral links

4 Pole Flow™ Connectors

- CT300** 250V 20A 4 Pole (1 in 3 Out) Flow™ Hub Junction Box
- CT350** 250V 20A 4 Pole Splitter (1 in 2 Out)
- CT355** 250V 20A 4 Pole (1 in 2 Out) Compact Splitter



CT2300 is pre-wired with earth and neutral links.

Standards: BS 8488, BS 5733, BS EN 61535

Cable Size: 4 x 1mm² Flex / 3 x 2.5mm² **Current Rating:** 20A

Dimensions: CT1300: 82xmm x 75mm x 25mm CT2300: 89xmm x 85mm x 24mm
CT300: 82mm x 82mm x 55mm CT350: 85mm x 116mm x 25mm