



GM2080PW



GM2081PW



GM2082PW



GM2080BK



GM2081BK



GM2082BK




MODULE BACK

DIMENSIONS (mm)
GM2080/ GM2081/ GM2082



TYPICAL WIRING DIAGRAM

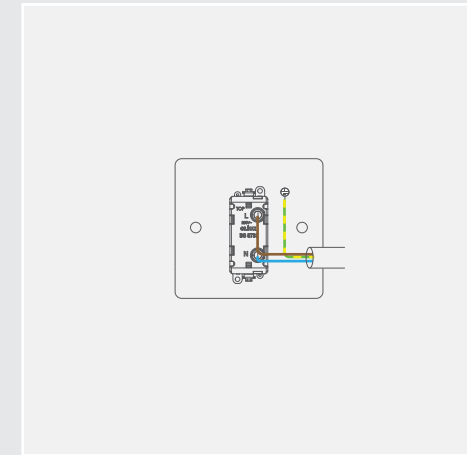

Indicator Modules

- GM2080BK** 240V – Red Indicator Module - Black
- GM2080PW** 240V – Red Indicator Module - White
- GM2081BK** 240V – Amber Indicator Module - Black
- GM2081PW** 240V – Amber Indicator Module - White
- GM2082BK** 240V – Green Indicator Module - Black
- GM2082PW** 240V – Green Indicator Module - White

Material Composition

Indicator Lens: Polycarbonate / ABS
Cover, Insert & Rear Housing: Nylon
Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

- Voltage** 250V – 50Hz
- Terminal Size** 5mm ø
- Torque Value** 1.2Nm
- Cable Size** 2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
- Back Box Depth** 25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
- Modular** Yes
- Warranty** 10 Years
- IP Rating** IP20
- Operational Temperature** -5°C to +40°C
- Standards** BS 5733: 2010

Standards: Indicator Module: BS5733
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.