



FS030SS



FS311SS



FS032SS

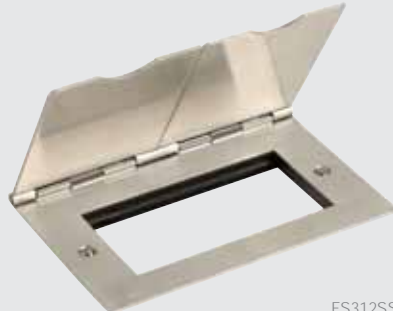

FS312SS



For a complete range of New Media™ modules please see our dedicated New Media™ section.

Floor Socket Outlets

- FS030SS** 13A 1 Gang Floor Socket
- FS032SS** 13A 2 Gang Floor Socket
13A floor socket outlets BS Kitemark Approved

Unfurnished Floor Plates - For Use With New Media™ Modules

- FS311SS** 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
- FS312SS** 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Standards: BS 1363
 Back Box Depth: 311/312: Dependent on modules fitted 030/032: 35mm Minimum
 Cable Size: 311/312: Dependent on modules fitted 030/032: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 030/311: 86mm x 93mm 032/312: 146mm x 93mm



PRW208



PRW210/
PRW211



PRC009



PRC210



PRW213



PRC216

Pull Cord Switches

- PRC009** 10AX 2 Way Ceiling Pull Cord Switch
- PRC210** 10AX 2 Way Pull Cord Switch
- PRC216** 16A DP Pull Cord Switch With Neon
Decorative covers available, see overleaf.

Pull Cord Switches

- PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch
- PRW210** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW211** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
(Twin Terminal Screws)
- PRW213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
(Twin Terminal Screws) C/W Pattress

Standards: BS EN 60669 Cable Size: PRC210: 3 x 2.5mm² / 1 x 6mm² PRW211: 2 x 6mm² / 1 x 25mm² PRC009, PRW208, PRC216: 2 x 1.5mm² / 1 x 2.5mm² PRW210: 1 x 16mm²
 Dimensions: PRC009: 75.5mm Dia. x 43.5mm PRC210/216: 70mm Dia. x 42mm PRW208: 86mm x 86mm x 43mm
 PRW210/211: 86mm x 86mm x 43mm PRW213: 100mm Dia. x 77mm