





DIMENSIONS (mm)

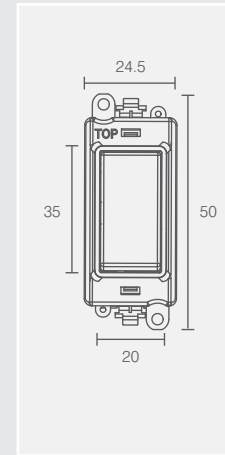

TYPICAL 1 WAY SWITCHED CIRCUIT

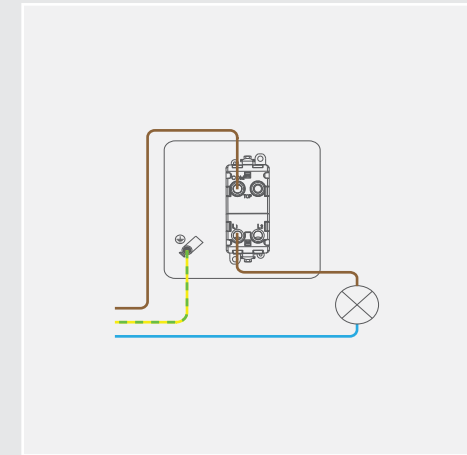

20AX 1 Way Switch Modules

GM2001PW	20AX 1 Way Switch Module - White
GM2001BK	20AX 1 Way Switch Module - Black
GM2001PWBR	20AX 1 Way Switch Module - White - Polished Brass
GM2001PWBS	20AX 1 Way Switch Module - White - Brushed Stainless
GM2001PWCH	20AX 1 Way Switch Module - White - Polished Chrome
GM2001PWPB	20AX 1 Way Switch Module - White - Pearl Nickel
GM2001PWSB	20AX 1 Way Switch Module - White - Satin Brass
GM2001PWSS	20AX 1 Way Switch Module - White - Satin Chrome
GM2001PWSS	20AX 1 Way Switch Module - White - Stainless Steel
GM2001BKAB	20AX 1 Way Switch Module - Black - Antique Brass
GM2001BKBN	20AX 1 Way Switch Module - Black - Black Nickel
GM2001BKBR	20AX 1 Way Switch Module - Black - Polished Brass
GM2001BKBS	20AX 1 Way Switch Module - Black - Brushed Stainless
GM2001BKCH	20AX 1 Way Switch Module - Black - Polished Chrome
GM2001BKPN	20AX 1 Way Switch Module - Black - Pearl Nickel
GM2001BKSB	20AX 1 Way Switch Module - Black - Satin Brass
GM2001BKSC	20AX 1 Way Switch Module - Black - Satin Chrome
GM2001BKSS	20AX 1 Way Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
 Back Box Depth: 25mm Minimum Cable Size: 2 x 4mm, 3 x 2.5mm, 1 x 6mm

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver *on-lay* Copper / Brass Contacts

Voltage

250V – 50Hz

Current Rating

20AX (suitable for inductive loads)

Terminal Size

5mm ø

Torque Value

1.2Nm

Cable Size

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

Modular

Yes

Warranty

10 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.