



GM2008PWCH



GM2008PWBR



GM2008PWSC



GM2008PWBS



GM2008BKBN



GM2008BKPN




GM2008BKSB



MODULE BACK

DIMENSIONS (mm)

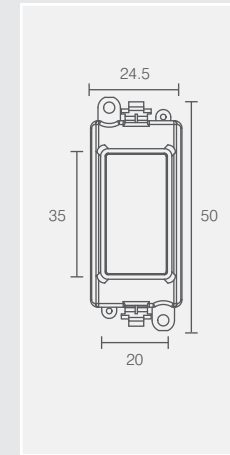

**Blank Modules**

- GM2008PW Blank Module - White
- GM2008BK Blank Module - Black
- GM2008PWBR Blank Module - White - Polished Brass
- GM2008PWBS Blank Module - White - Brushed Stainless
- GM2008PWCH Blank Module - White - Polished Chrome
- GM2008PWPN Blank Module - White - Pearl Nickel
- GM2008PWSB Blank Module - White - Satin Brass
- GM2008PWSC Blank Module - White - Satin Chrome
- GM2008PWSS Blank Module - White - Stainless Steel
- GM2008BKAB Blank Module - Black - Antique Brass
- GM2008BKBN Blank Module - Black - Black Nickel
- GM2008BKBR Blank Module - Black - Polished Brass
- GM2008BKBS Blank Module - Black - Brushed Stainless
- GM2008BKCH Blank Module - Black - Polished Chrome
- GM2008BKPN Blank Module - Black - Pearl Nickel
- GM2008BKSB Blank Module - Black - Satin Brass
- GM2008BKSC Blank Module - Black - Satin Chrome
- GM2008BKSS Blank Module - Black - Stainless Steel

Back Box Depth: 25mm Minimum

**Material Composition**

Module Front: Nylon or Nylon + Stainless Steel Cover (Ingot)  
Cover, Insert & Rear Housing: Nylon

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS 5733:2010 (where applicable)

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.