





DIMENSIONS (mm)

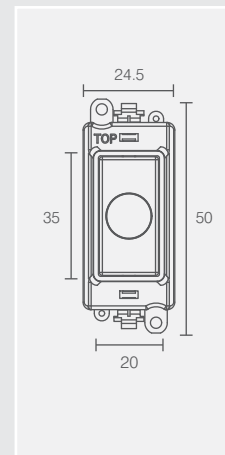

TYPICAL WIRING DIAGRAM

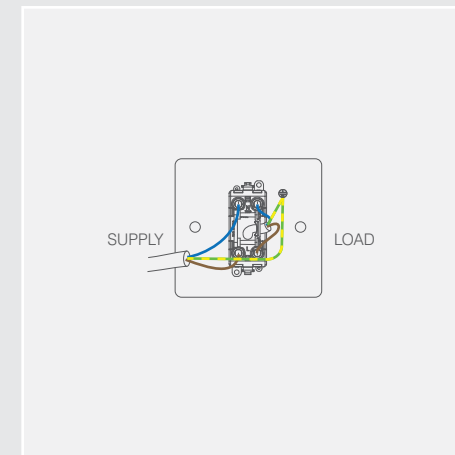

20A Flex Outlet Modules

GM2017PW	20A Flex Outlet Module - White
GM2017BK	20A Flex Outlet Module - Black
GM2017PWBR	20A Flex Outlet Module - White - Polished Brass
GM2017PWBS	20A Flex Outlet Module - White - Brushed Stainless
GM2017PWCH	20A Flex Outlet Module - White - Polished Chrome
GM2017PWPB	20A Flex Outlet Module - White - Pearl Nickel
GM2017PWSB	20A Flex Outlet Module - White - Satin Brass
GM2017PWSC	20A Flex Outlet Module - White - Satin Chrome
GM2017PWSS	20A Flex Outlet Module - White - Stainless Steel
GM2017BKAB	20A Flex Outlet Module - Black - Antique Brass
GM2017BKBN	20A Flex Outlet Module - Black - Black Nickel
GM2017BKBR	20A Flex Outlet Module - Black - Polished Brass
GM2017BKBS	20A Flex Outlet Module - Black - Brushed Stainless
GM2017BKCH	20A Flex Outlet Module - Black - Polished Chrome
GM2017BKPN	20A Flex Outlet Module - Black - Pearl Nickel
GM2017BKSB	20A Flex Outlet Module - Black - Satin Brass
GM2017BKSC	20A Flex Outlet Module - Black - Satin Chrome
GM2017BKSS	20A Flex Outlet Module - Black - Stainless Steel

Standards: Flex Outlet Module: BS5733
 Back Box Depth: 25mm Minimum Cable Size: 2 x 4mm, 3 x 2.5mm, 1 x 6mm

Material Composition

Module Front: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated

Voltage

250V ~ 50Hz

Current Rating

20A

Terminal Size

5mm ø

Torque Value

1.2Nm

Cable Size

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

Modular

Yes

Warranty

10 Years

Antimicrobial Certified

Yes (Non Ingot Modules Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS 5733: 2010

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.