



GM2018PW-CH



GM2018PWS-TD



GM2018BK-BL



MODULE BACK

The GM2018 modules listed are available with the following laser etched legends:

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater

Suffix the two letters to complete the product code with legend eg. GM2018PWCH-WM


**IN HOUSE LASER ETCHING**  
 Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**20AX Double Pole Switch Modules - Printed Legend**


<b>GM2018PW</b>	20AX Double Pole Switch Module - White
<b>GM2018BK</b>	20AX Double Pole Switch Module - Black
<b>GM2018PWBR</b>	20AX Double Pole Switch Module - White - Polished Brass
<b>GM2018PWBS</b>	20AX Double Pole Switch Module - White - Brushed Stainless
<b>GM2018PWCH</b>	20AX Double Pole Switch Module - White - Polished Chrome
<b>GM2018PWPN</b>	20AX Double Pole Switch Module - White - Pearl Nickel
<b>GM2018PWBSB</b>	20AX Double Pole Switch Module - White - Satin Brass
<b>GM2018PWSC</b>	20AX Double Pole Switch Module - White - Satin Chrome
<b>GM2018PWSS</b>	20AX Double Pole Switch Module - White - Stainless Steel
<b>GM2018BKAB</b>	20AX Double Pole Switch Module - Black - Antique Brass
<b>GM2018BKBN</b>	20AX Double Pole Switch Module - Black - Black Nickel
<b>GM2018BKBR</b>	20AX Double Pole Switch Module - Black - Polished Brass
<b>GM2018BKBS</b>	20AX Double Pole Switch Module - Black - Brushed Stainless
<b>GM2018BKCH</b>	20AX Double Pole Switch Module - Black - Polished Chrome
<b>GM2018BKPN</b>	20AX Double Pole Switch Module - Black - Pearl Nickel
<b>GM2018BKSB</b>	20AX Double Pole Switch Module - Black - Satin Brass
<b>GM2018BKSC</b>	20AX Double Pole Switch Module - Black - Satin Chrome
<b>GM2018BKSS</b>	20AX Double Pole Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1  
 Back Box Depth: 25mm Minimum Cable Size: 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

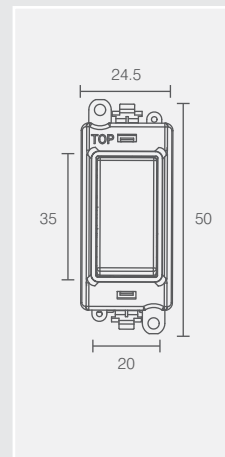

TYPICAL WIRING DIAGRAM

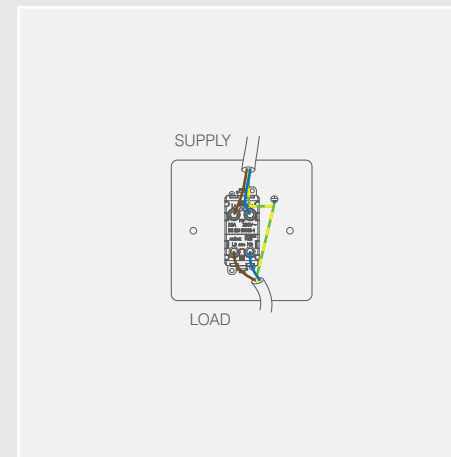

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

5mm ø

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1:1999 + A1:2002 + A2:2008

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.