


# Insulation Sleeving

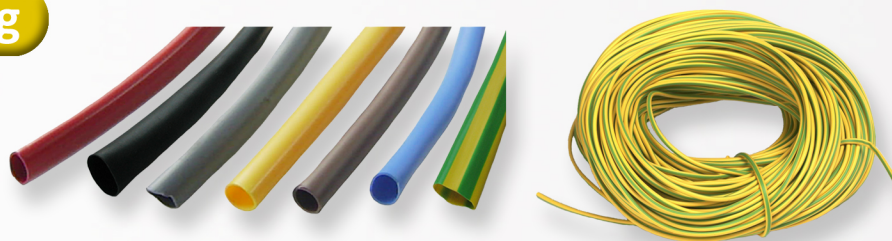

## PVC Sleeving

### Description:

PVC sleeving is supplied in a wide range of sizes and colours. In addition to the size range shown we can supply alternative diameters and wall thickness to meet particular applications as required. A versatile material in common use ideal for cable or harnessing covering.

Continuous operating temp: -20°C to 70°C	Elongation at break: 220%
Insulation resistance: 10 <sup>10</sup> Ohm/cm	Hardness: BSS20-30
Dielectric Strength: 20kV/mm	Flammability: Self-extinguishing
Tensile Strength: 15MPa	RoHS compliant

Hanks Part No.	Reel Part No.	Internal Diameter (mm)	Nominal Wall Thickness (mm)	Coil Size (metres)
PVC1.5*	N/A	1.5	0.5	100
PVC2*	PVC2*-REEL	2.0	0.5	100
PVC3*	PVC3*-REEL	3.0	0.5	100
PVC4*	PVC4*-REEL	4.0	0.5	100
PVC5*	N/A	5.0	0.5	100
PVC6*	N/A	6.0	0.5	100
PVC8*	N/A	8.0	0.5	100
PVC10*	N/A	10.0	0.5	100
PVC12*	N/A	12.0	0.5	100



Reel

\* Suffix Part No. with the colour required e.g. green/yellow = PVC3G/Y

**NB.** 85°C and 105°C rated sleeving only available to special order.

Can be supplied in alternative wall thickness or on reels to special order.

All sizes available in cut lengths (subject to minimum order quantities).

Standard colours: black (BLK), red (RED), blue (BLU), white (WHI), green/yellow (G/Y), brown (BRO), yellow (YEL) and grey (GRY).

Other sizes and colours available may be subject to minimum order - green, violet, orange, pink and clear.

### PVC Sleeving 5 metre Packs

Part No.			Colour
3mm Internal Diameter	4mm Internal Diameter	6mm Internal Diameter	
BLK3-P5M	BLK4-P5M	BLK6-P5M	Black
BLU3-P5M	BLU4-P5M	BLU6-P5M	Blue
BR3-P5M	BR4-P5M	BR6-P5M	Brown
GREY3-P5M	GREY4-P5M	GREY6-P5M	Grey
RED3-P5M	RED4-P5M	RED6-P5M	Red
GY3-P5M	GY4-P5M	GY6-P5M	Green/Yellow