


# BIS RapidRail® Fixing Rail

(G 04 05)

suspension and support

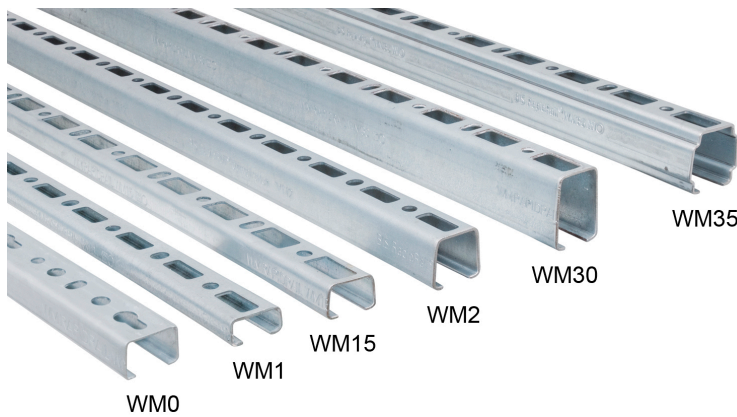

## Features and benefits


- C-profile
- for a quick and easy fixing
- with continuous perforation (on request without perforation)
- distance between rail end and first hole is always equal
- unique perforation on rail WM15, WM30 and WM35 allows for hanging on both sides
- pre-galvanized
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- yield strength 240 N/mm<sup>2</sup>



RAL-GZ 655/C  
Cert.Nr. 2012-03

Part No.	Type	L	B	H	s	S	RAL	BndS	BndL
			(mm)	(mm)	(mm)	(mm)			
650 5 000	WM0	2 m	27	18	1.20	15	RAL <sup>1</sup>	20	400
650 5 300	WM0	3 m	27	18	1.20	15	RAL <sup>1</sup>	30	600
650 5 001	WM1	2 m	30	15	2.00	15	RAL <sup>1</sup>	20	480
650 5 301	WM1	3 m	30	15	2.00	15	RAL <sup>1</sup>	30	720
650 5 601	WM1	6 m	30	15	2.00	15	RAL <sup>1</sup>	60	720
650 5 015	WM15	2 m	30	20	1.75	15	RAL <sup>1</sup>	20	480
650 5 615	WM15	6 m	30	20	1.75	15	RAL <sup>1</sup>	60	720
650 5 002	WM2	2 m	30	30	2.00	15	RAL <sup>1</sup>	20	400
650 5 602	WM2	6 m	30	30	2.00	15	RAL <sup>1</sup>	60	600
650 5 030	WM30	2 m	30	45	2.00	15	RAL <sup>1</sup>	20	240
650 5 630	WM30	6 m	30	45	2.00	15	RAL <sup>1</sup>	60	360
650 5 235	WM35	2 m	38	40	2.00	15	-	20	100
650 5 335	WM35	3 m	38	40	2.00	15	-	30	150
650 5 635	WM35	6 m	38	40	2.00	15	-	60	300

RAL<sup>1</sup> = tested, certified and monitored by a third party according to RAL-GZ 655/C.  
For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.  
For more information about the max. allowed load (Fa,z) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

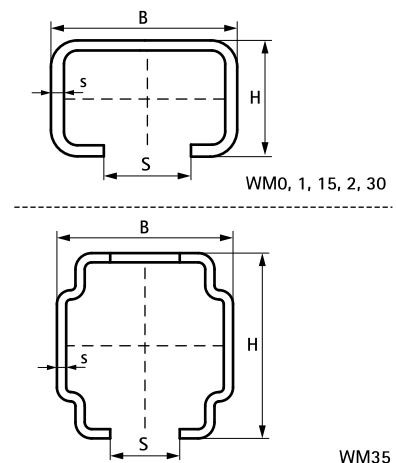

### Complementary

BIS RapidRail® Slide Nut  
BIS RapidRail® Hammerfix  
BIS Rail End Cap

### Complementary

BIS RapidRail® Connector 90°  
BIS RapidRail® Connector 135°