


BIS RapidRail® T- and X-Connector

(G 35 45)

to make BIS RapidRail® fabrications



658 4 091




658 4 090

Features and benefits


- connector with pre-assembled BIS RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for WMO, 1, 15, 2, 30, 35
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated

Part No.	Type	T (max.) (Nm)	For Rail	Fa,x (N)	RAL	Pack 1
658 4 090	T	15.0	WMO - 35	345	RAL ¹	25
658 4 091	X	15.0	WMO - 35	345	RAL ¹	25

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/D in combination with Rail WM1, 2, 15 and 30. For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.





658 4 090





658 4 091



RAL-GZ 655/D
Cert.Nr. 2012-08



658 4 090

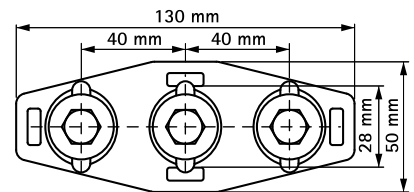

658 4 091