



Cable Management

Spiral Wrap Binding

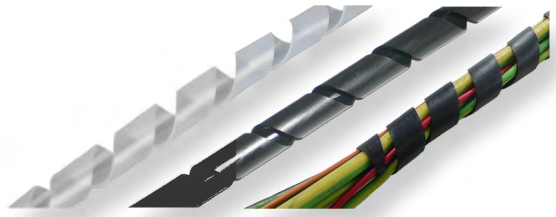


- Material: Polyethylene. (PE)
- Application: An easy and economical way of bundling cables and harnesses and providing harness breakouts. Wrap clockwise to apply.
- Features: Flexible and easy to install. Durable, abrasion resistant, reusable with retained spiral strength - won't change shape after second usage.
- Temperature range: -30°C to +80°C
- Flammability: UL94HB



Part No.	Internal Dia. (mm) E	External Dia. (mm) D	Bundle Dia (mmØ)	Coil Size (m)
SP4*-10	5.0	6	4-50	10
SP6*-10	7.0	8	6-60	10
SP9*-10	10.2	12	9-65	10
SP12*-10	13.0	15	12-70	10
SP15*-10	16.4	19	15-100	10
SP20*-10	21.0	24	20-130	10

* Add suffix to part no. to denote colour required: N - natural, B - black

Expandable 'Push-back' Cable Jacketing

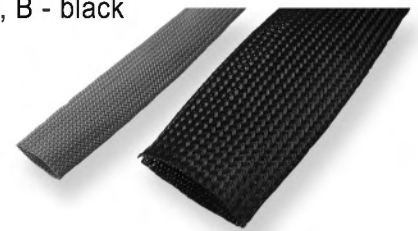

- Ideal product to support and protect cable harnesses
- Offers superb flexibility
- Available in black or grey

Fumes Toxicity: Passes CEI 754-1 and CEI 754-2 Halogen free

Fumes Opacity: Passes NF C 20452 (Polymer)

Chemical Resistance: Unaffected by most chemicals

Properties:

Monofilament: Polyester - size 0.22mm

Melting Point: +250°C

Limiting Oxygen Index: 34%

Working Temperature: -50°C to +150°C

Whitland Peaks: 220°C

Flame Resistance:

Passes flame requirement of CEI 332-1

and FMVSS 302 (Type A)

12 according to NF F 16-101

Part No.	Size (mm)		Coil Size (m)
	Normal	Expanded	
PBJ5*-100	5	10	100
PBJ10*-100	10	18	100
PBJ12*-50	12	20	50
PBJ15*-50	15	25	50
PBJ20*-25	20	38	25
PBJ25*-25	25	46	25
PBJ30*-25	30	55	25
PBJ40*-25	40	75	25

* Suffix part number BLK (black) or GRY (grey).