


Swifts® MRF medium duty return flange cable tray

fittings




90° flat bend
MRFB 225 PG



Adjustable bend
MRFAB 225 PG



Inside riser
MRFIR 225 PG

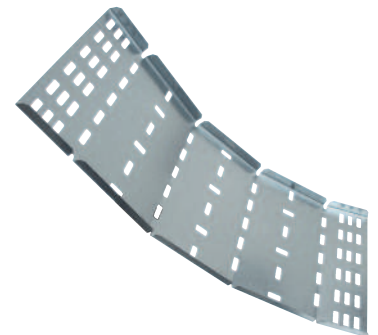

Adjustable riser
MRFAR 225 PG

Selection charts **p. 12-13**

Dimensions and technical information : lengths **p. 46** ; fixing options **p. 50** ; fittings **p. 51-63**

Design notes **p. 118**

Loading graphs **p. 46**




| Pack | Cat. Nos. | Fittings (continued) |
|------|-----------|---|
| 1 | MRFB WF | All fittings have integral fishplates No couplers required 90° bends For technical information, p. 52-53 |
| 1 | MRFB WAF | 60°, 45° and 30° bends For 50-300 mm wide, adjustable bends can also be used For technical information, p. 52-53 |
| 1 | MRFAB WF | Adjustable bends 50-300 mm wide only For technical information, p. 54-55 |
| 1 | MRFIR WF | 90° inside riser For technical information, p. 56 |
| 1 | MRFIR WAF | 60°, 45°, 30° inside riser For technical information, p. 56 |
| 1 | MRFOR WF | 90° outside riser For technical information, p. 56 |
| 1 | MRFOR WAF | 60°, 45°, 30° outside riser For technical information, p. 56 |

| Pack | Cat. Nos. | Fittings (continued) |
|------|-------------|---|
| 1 | MRFAR WF | Adjustable risers (inside or outside) For technical information, p. 57 |
| 1 | MRFAXR WF | Extra long adjustable risers (inside or outside) For technical information, p. 58 |
| 1 | MRFT WF | Equal tees For technical information, p. 59 |
| 1 | MRFUT W B F | Unequal tees For technical information, p. 60-61 |
| 1 | MRFX WF | 4 way crosspieces For technical information, p. 62 |
| 1 | MFRFR W K F | Straight reducers For technical information, p. 63 |



Additional gauges and finishes available to special order

Contact us on +44 (0) 345 605 4333



Key : selecting MRF medium duty fittings. Replace the letters shown in red with your choice from the following options :

- W = Widths (mm) : 50, 75, 100, 150, 225, 300, 450, 600, 750, 900
- A = Angle (°) : 60, 45 and 30 (90 does not need to be included in order code)
- B = Branch width (mm) : 50, 75, 100, 150, 225, 300, 450, 600, 750
- F = Finish : G (hot dip galvanised after manufacture),
D (deep galvanised), PG (pre-galvanised steel),
S (stainless steel), E (powder coated black RAL 9005)
- K = Narrowed width when using a reducer (mm) :
50, 75, 100, 150, 225, 300, 450, 600, 750