

Pre-insulated Terminals



Fully Insulated Female Push-on

Wire Range mm ² (AWG)	Part No.	Dimensions mm							Tab Size
		D1	D2	D3	H	L	L1		
	28RFPT	1.8	3.2	4.3	5.5	20.0	10.0	2.8 x 0.5	
	28RFPTX	1.8	3.5	4.3	5.5	20.0	10.0	2.8 x 0.8	
	48RFPT	1.8	5.5	4.3	5.5	20.0	10.0	4.8 x 0.5	
	48RFPTX	1.8	5.5	4.3	5.5	20.0	10.0	4.8 x 0.8	
0.5-1.5 (22 - 16)	63RFPT	1.8	6.6	4.3	5.5	21.5	10.5	6.3 x 0.8	
	48BFPT	2.3	5.0	4.8	5.5	20.0	10.0	4.8 X 0.5	
	48BFPTX	2.3	5.0	4.8	5.5	20.0	10.0	4.8 X 0.8	
	63BFPT	2.3	6.6	4.8	5.5	21.5	10.5	6.3 X 0.8	
1.5-2.5 (16 - 14)									
	63YFPT	3.5	6.6	6.0	6.5	23.5	13.7	6.3 X 0.8	
	95YFPT	3.5	10.0	6.0	6.5	30.0	13.7	9.5 X 1.2	
4-6 (12 - 10)									


Pack Quantity: 100

Max. elec. rating: ■ 10 amp ■ 15 amp ■ 24 amp
300 volts 75°C

Material: Brass - Tin Plated
Insulation: Polyvinyl Chloride



RoHS compliant

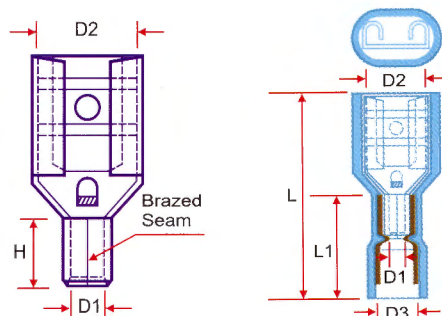

Flag Female Push-on

Material: Brass - Tin Plated

RoHS compliant



Insulation: Nylon

Max. elec. rating: 300 volts 75°C

Part No.	mm ²	Tab Size	Amp Rating
63RFPT/RA	0.5-1.5	6.3 x 0.8	10
63BFPT/RA	1.5-2.5	6.3 x 0.8	15

Pack Quantity: 100



Pre-insulated Terminals