

Pre-insulated Terminals

Bullets (Male/Female)

Material: Brass-Tin Plated
Insulation: Polyvinyl Chloride

RoHS compliant




Max. elec. rating: ■ 10 amp
■ 15 amp
■ 24 amp
300 volts 75°C



Male

Female

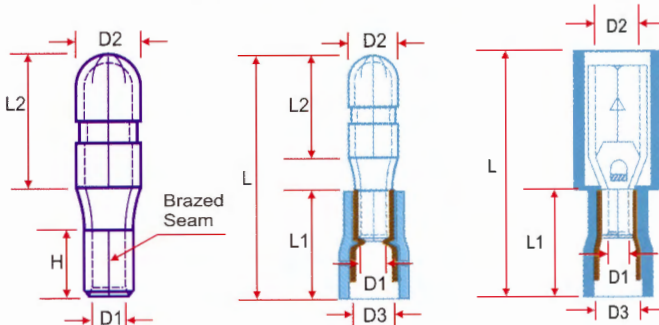

Male

Wire Range mm ² (AWG)	Part No.	Dimensions mm						
		D1	D2	D3	L	L1	L2	H
0.5-1.5 (22 - 16)	 4RBM	1.8	4.0	4.3	20.7	10.0	8.5	5.5
1.5-2.5 (16 - 14)	 4BBM	2.3	4.0	4.8	20.5	10.0	8.5	5.5
	 50BBM	2.3	5.0	4.8	21.0	10.0	8.5	5.5
4-6 (12 - 10)	 50YBM	3.5	5.0	6.6	25.0	13.5	8.5	6.5

Pack Quantity: 100

Female

Wire Range mm ² (AWG)	Part No.	Dimensions mm						
		D1	D2	D3	L	L1	L2	H
0.5-1.5 (22 - 16)	 4RSF	1.8	4.0	4.3	23.6	10.5	7.3	5.5
1.5-2.5 (16 - 14)	 4BSF	2.3	4.0	4.3	23.6	11.5	7.3	5.5
	 50BSF	2.3	5.0	4.8	23.6	11.5	7.0	5.5
4-6 (12 - 10)	 50YSF	3.5	5.0	6.5	26.7	13.8	7.0	6.5

Pack Quantity: 100

Modular Plugs and Plug Covers

Part No.	Description
RJ45-8A2	Modular Plug (stranded wire)
RJ45-8A3	Modular Plug (stranded wire or solid wire)
RJ45-60GY	Grey Plug Cover
RJ45-60R	Red Plug Cover
RJ45-60Y	Yellow Plug Cover
RJ45-60BL	Blue Plug Cover

Pack Quantity: 100

Tools to crimp modular plugs and plug covers:

Pressmaster 4300-3149 tool frame

& RJ45 4300-3144 (see pages 155 & 157)

MCK (see page 174)

MCT (see page 174)

IPDT-KR (see page 174)



IPDT-KR

MCT

MCK



4300-3149



4300-3144