

# Cable Glands



## PEX® CW Commercial Brass Cable Gland Pack

### 4 Part Outdoor




**Application:** Brass indoor and outdoor 4 part cable gland suitable for all types of steel wire armoured cable (SWA), providing an environmental seal on the outer cable sheath. The gland also provides mechanical cable retention and electrical continuity via armour wire termination.

**Operating Temperature (standard seals):** -20°C to +80°C

**Ingress Protection:** IP66 EN60529

**Approval:** BS EN 62444 : 2013

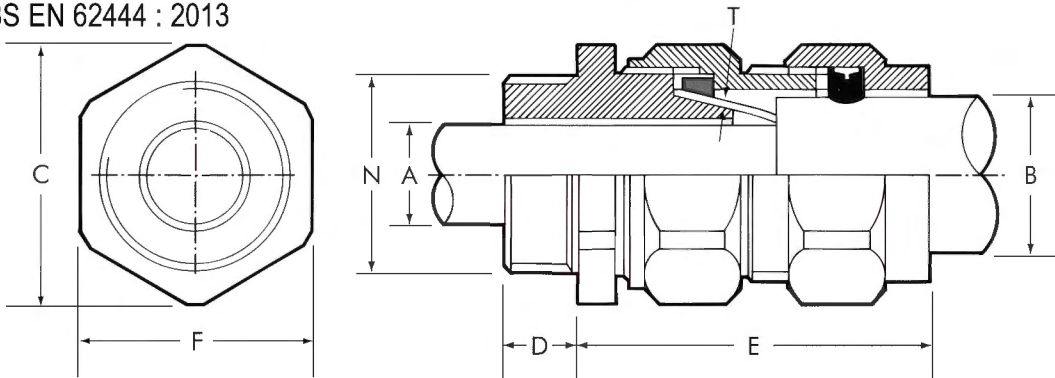

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details				Assembled Length
		Diameter N	Length D	Diameter A max	Diameter B min max	Armour Wire Size T	Body & Back Nut A/F F	A/C C	Compression Nut A/F J	A/C K	
PCW20S PACK	2	20	10	11.8	12.9 - 15.8	0.90/1.25	23.0	25.6	24.0	26.7	38.0
PCW20 PACK	2	20	10	13.8	15.5 - 20.5	0.90/1.25	26.0	28.9	28.0	31.1	39.0
PCW25 PACK	2	25	10	19.8	20.3 - 27.0	1.25/1.60	34.0	37.7	35.5	39.5	45.0
PCW32 PACK	2	32	10	26.4	26.7 - 33.5	1.60/2.00	42.0	46.8	46.0	51.2	48.0
PCW40 PACK	1	40	15	32.4	33.0 - 40.1	1.60/2.00	50.0	55.7	55.0	61.0	53.0
PCW50S PACK	1	50	15	38.0	39.8 - 46.3	2.00/2.50	62.0	69.1	65.0	72.4	59.0
PCW50 PACK	1	50	15	44.0	46.0 - 52.6	2.00/2.50	62.0	69.1	65.0	72.1	59.0
PCW63S PACK	1	63	15	49.0	52.3 - 61.5	2.50	76.0	84.7	80.0	89.2	66.0
PCW63 PACK	1	63	15	55.5	58.4 - 65.3	2.50	76.0	84.7	80.0	88.8	66.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud or

Low Smoke Zero-halogen LSZH shroud -

Suffix above part numbers with either -LSF or -LSZH



See page 44 for EarthingNut™ Information.



TEL: (44) 01453 844333 | FAX: (44) 01453 842224 | E-MAIL: sales@swaonline.co.uk