

Glade

PRODUCT FEATURES

- Dimensions: 1W: 44mm(Ø) 34mm(H) 5W: 77mm(Ø) 55mm(H)
- Cut out dimensions: 1W: 35-38mm(Ø) 5W: 60-65mm(Ø)
- Light source: LED
- Power consumption: 1W or 5W versions
- Lumen output: 60 lm or 194 lm
- IP Rating: IP40
- 1W non-maintained, 5W maintained
- Weight: 1W: 0.254Kg 5W: 0.785Kg
- Compliance: BS EN 60598-2-22 and other relevant standards



5W

1W

PHOTOMETRIC SPACING DATA (1 lux)

GLADE 1W

Mounting height	↔	↔	↔	↔
2.5m	2.4	5.8	5.4	2.4
4m	1.0	4.9	5.2	1.0

PHOTOMETRIC SPACING DATA (1 lux)

GLADE 5W

Mounting height	↔	↔	↔	↔
2.5m	2.8	5.7	5.7	2.8
4m	3.4	7.3	7.3	3.4
6m	3.9	9.6	9.6	3.9

PRODUCT CODE


DESCRIPTION

E/GL/LED/NM3/1W/WH	Glade 1W non-maintained LED mini down light - white
E/GL/LED/M3/5W/WH	Glade 5W maintained LED mini down light - white

Ceilo


PRODUCT FEATURES

- Dimensions: Downlight: 50mm(Ø) 25mm(D)
- Cut Out: 40mm (Ø)
- Maintained and non-maintained
- Self test and DALI versions available
- Power consumption: 5W
- Lumen Output: 150 lm
- Weight: 0.32Kg
- Compliance: BS EN 60598-2-22



PHOTOMETRIC SPACING DATA (1 lux)

Mounting height	↔	↔
2.5m	3.0	5.8
4m	3.45	6.4

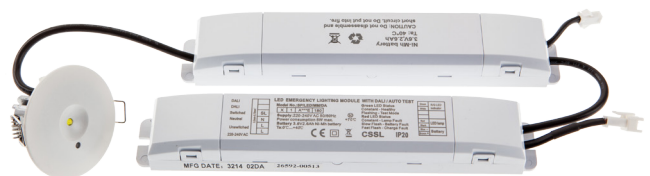

PRODUCT CODE

DESCRIPTION

E/CEILO/LED/ST	Ceilo downlight 5W, maintained and non-maintained self-test version
E/CEILO/LED/DALI	Ceilo downlight 5W, maintained and non-maintained Dali version