

## LB PLUS straight lengths – Type A

### straight lengths 25-63 A



## LB PLUS straight lengths – Type B

### straight lengths 25-63 A



75160102

75360102H

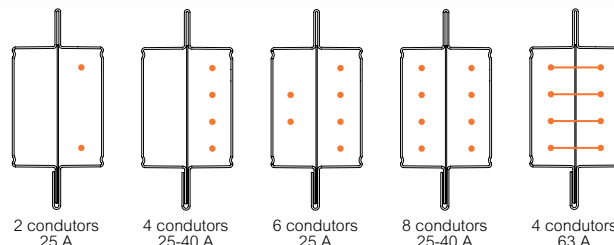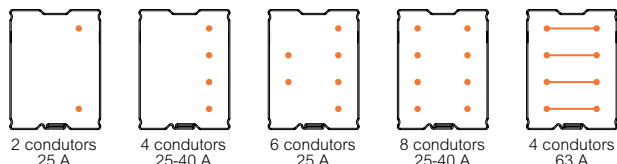

Selection chart **p. 6-7**  
 Technical data **p. 12**  
 Dimensions and technical information **p. 14-15**



Selection chart **p. 6-7**  
 Technical data **p. 13**  
 Dimensions and technical information **p. 14-15**

Pack	Cat. Nos.	Straight lengths – Type A										
		Rigid galvanised steel casing 3 m maximum distance between suspension brackets Conductors insulated with self-extinguishing plastic (IEC 60695-2-12 and V0 according to UL94) Standard tap-off outlets with captive IP 55 plug-outlet covers Protection index IP 55 Impact resistance : IK 07										
1	75150101	<b>252 with 2 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>2</td> <td>3-0</td> <td>2</td> <td>3-00</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	2	3-0	2	3-00
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	2	3-0	2	3-00								
1	75160101	<b>254 with 4 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>4</td> <td>3-0</td> <td>2</td> <td>3-10</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	4	3-0	2	3-10
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	4	3-0	2	3-10								
1	75160102	<b>254 with 4 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>4</td> <td>3-0</td> <td>4</td> <td>3-20</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	4	3-0	4	3-20
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	4	3-0	4	3-20								
1	75170101	<b>256 with 6 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>6</td> <td>3-0</td> <td>2 + 2</td> <td>3-65</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	6	3-0	2 + 2	3-65
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	6	3-0	2 + 2	3-65								
1	75180101	<b>258 with 8 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>8</td> <td>3-0</td> <td>2 + 2</td> <td>3-75</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	8	3-0	2 + 2	3-75
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	8	3-0	2 + 2	3-75								
1	75180102	<b>258 with 8 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>8</td> <td>3-0</td> <td>4 + 4</td> <td>3-85</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	8	3-0	4 + 4	3-85
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	8	3-0	4 + 4	3-85								
1	75200101	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>3-0</td> <td>2</td> <td>3-55</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	3-0	2	3-55
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	3-0	2	3-55								
1	75200102	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>3-0</td> <td>4</td> <td>3-65</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	3-0	4	3-65
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	3-0	4	3-65								
1	75200111 <sup>1</sup>	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>1-5</td> <td>2</td> <td>2-00</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	1-5	2	2-00
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	1-5	2	2-00								
1	75220101	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>3-0</td> <td>2 + 2</td> <td>4-70</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	3-0	2 + 2	4-70
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	3-0	2 + 2	4-70								
1	75220102	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>3-0</td> <td>4 + 4</td> <td>4-80</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	3-0	4 + 4	4-80
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	3-0	4 + 4	4-80								
1	75220111 <sup>2</sup>	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>1-5</td> <td>1 + 1</td> <td>2-50</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	1-5	1 + 1	2-50
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	1-5	1 + 1	2-50								
1	75240101	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>3-0</td> <td>2 + 2</td> <td>4-70</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	3-0	2 + 2	4-70
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	3-0	2 + 2	4-70								
1	75240102	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>3-0</td> <td>4 + 4</td> <td>4-80</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	3-0	4 + 4	4-80
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	3-0	4 + 4	4-80								
1	75240111	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>1-5</td> <td>1 + 1</td> <td>2-50</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	1-5	1 + 1	2-50
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	1-5	1 + 1	2-50								

1 : For use with both 25 and 40 A systems, and also 2 and 4 conductor versions  
 2 : For use with both 25 and 40 A systems, and also 6 and 8 conductor versions

Pack	Cat. Nos.	Straight lengths – Type B										
		Reinforced highly rigid galvanised steel casing 7 m maximum distance between suspension brackets Conductors insulated with self-extinguishing plastic ZH (zero halogen) Standard tap-off outlets with captive IP 55 plug-outlet covers Mechanical separation of the 2 sides of the bar, (6 and 8 conductors versions) Protection index IP 55 Impact resistance : IK 07										
1	75350102H	<b>252 with 2 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>2</td> <td>3-0</td> <td>4</td> <td>5-45</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	2	3-0	4	5-45
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	2	3-0	4	5-45								
1	75360102H	<b>254 with 4 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>4</td> <td>3-0</td> <td>4</td> <td>5-55</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	4	3-0	4	5-55
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	4	3-0	4	5-55								
1	75360103H	<b>254 with 4 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>4</td> <td>3-0</td> <td>6</td> <td>5-60</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	4	3-0	6	5-60
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	4	3-0	6	5-60								
1	75370101H	<b>256 with 6 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>6</td> <td>3-0</td> <td>4 + 4</td> <td>6-10</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	6	3-0	4 + 4	6-10
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	6	3-0	4 + 4	6-10								
1	75380101H	<b>258 with 8 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>8</td> <td>3-0</td> <td>4 + 4</td> <td>6-20</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	8	3-0	4 + 4	6-20
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	8	3-0	4 + 4	6-20								
1	75380102H	<b>258 with 8 x 25 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>8</td> <td>3-0</td> <td>6 + 6</td> <td>6-35</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	25	8	3-0	6 + 6	6-35
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
25	8	3-0	6 + 6	6-35								
1	75400102H	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>3-0</td> <td>4</td> <td>6-00</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	3-0	4	6-00
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	3-0	4	6-00								
1	75400103H	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>3-0</td> <td>6</td> <td>6-10</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	3-0	6	6-10
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	3-0	6	6-10								
1	75400111H <sup>1</sup>	<b>404 with 4 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>4</td> <td>1-5</td> <td>2</td> <td>3-20</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	4	1-5	2	3-20
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	4	1-5	2	3-20								
1	75420101H	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>3-0</td> <td>4 + 4</td> <td>7-10</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	3-0	4 + 4	7-10
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	3-0	4 + 4	7-10								
1	75420102H	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>3-0</td> <td>6 + 6</td> <td>7-30</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	3-0	6 + 6	7-30
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	3-0	6 + 6	7-30								
1	75420111H <sup>2</sup>	<b>408 with 8 x 40 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>8</td> <td>1-5</td> <td>1 + 1</td> <td>3-70</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	40	8	1-5	1 + 1	3-70
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
40	8	1-5	1 + 1	3-70								
1	75440101H	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>3-0</td> <td>4 + 4</td> <td>7-10</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	3-0	4 + 4	7-10
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	3-0	4 + 4	7-10								
1	75440102H	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>3-0</td> <td>6 + 6</td> <td>7-30</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	3-0	6 + 6	7-30
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	3-0	6 + 6	7-30								
1	75440111H	<b>634 with 4 x 63 A conductors</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Conductors</th> <th>Length (m)</th> <th>Outlet points</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>4</td> <td>1-5</td> <td>1 + 1</td> <td>3-70</td> </tr> </tbody> </table>	Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)	63	4	1-5	1 + 1	3-70
Rating (A)	Conductors	Length (m)	Outlet points	Weight (kg)								
63	4	1-5	1 + 1	3-70								

1 : For use with both 25 and 40 A systems, and also 2 and 4 conductor versions  
 2 : For use with both 25 and 40 A systems, and also 6 and 8 conductor versions