


# Photocell Sensor

*Controls*

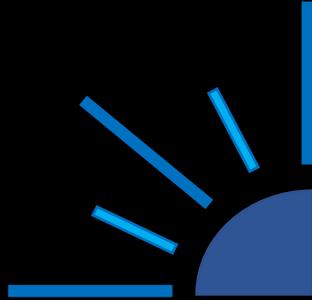

## Product Information

The Photocell sensor is ideal for modifying a luminaire into one that can turn on and off automatically when the light levels get to the required lux threshold setting.

With the IP54 rating this sensor can be integrated into a wider variety of luminaires which may be used in more demanding applications

Comes with a 5 year warranty

## Product Features

- 5 year warranty
- IP54
- 10A
- 5-50lux Adjustable Lux setting
- Standby Power <0.5w

# Product Specification


Product Code	Product Description	Light source Max load	Detection Range	Recommended Mounting Heights	Time Delay	Lux Settings	Protection Class
KSR8407	Photocell Sensor for Integral Products	10A Max	N/A	N/A	N/A	5-50lux	II

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Protection class	II
Ambient temperature range	-20°C~+40°C
Lux setting	5~50
Maximum rated load	10A
Parasitic power	0.5W
Material thickness	Up to 7.5mm
IP rating	54

## Construction

Body: Polycarbonate

## Product Dimensions

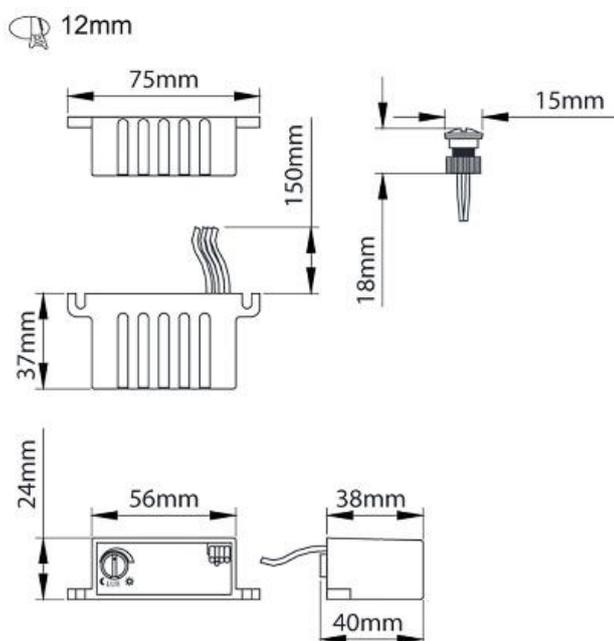

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.