

# Villas Mini

*Exterior Recessed Lighting*



Data Sheet

## Product Information

The Villas Mini LED recessed ground/wall lights are ideal for perimeter marker lighting.

Comes with a 2 year warranty for your peace of mind.

## Product Features

- 2 year warranty
- Class I
- IP67
- Instant on
- 3000K or 4000K LED
- CRI: Ra80
- Non dimmable
- Integral driver
- Can be wall or ground recessed
- Available in 1 way, 2 way, 3 way or 4 versions



KSR1370/74



KSR1371/75



KSR1372/76



KSR1373/77

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Energy Efficiency Class	Protection Class
KSR1370	Villas Mini 3W 3000K LED One Way Ground/Wall Light Stainless Steel Wall Light	3	3000	A	I
KSR1371	Villas Mini 3W 3000K LED Two Way Ground/Wall Light Stainless Steel Wall Light	3	3000	A	I
KSR1372	Villas Mini 3W 3000K LED Three Way Ground/Wall Light Stainless Steel Wall Light	3	3000	A	I
KSR1373	Villas Mini 3W 3000K LED Four Way Ground/Wall Light Stainless Steel Wall Light	3	3000	A	I
KSR1374	Villas Mini 3W 4000K LED One Way Ground/Wall Light Stainless Steel Wall Light	3	4000	A	I
KSR1375	Villas Mini 3W 4000K LED Two Way Ground/Wall Light Stainless Steel Wall Light	3	4000	A	I
KSR1376	Villas Mini 3W 4000K LED Three Way Ground/Wall Light Stainless Steel Wall Light	3	4000	A	I
KSR1377	Villas Mini 3W 4000K LED Four Way Ground/Wall Light Stainless Steel Wall Light	3	4000	A	I

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Ambient temperature range	-20°C~+40°C
Start time	< 0.5 sec
IP rating	67

## Construction

Body: 304 Stainless Steel  
Lens: Glass



## Standards

BSEN60598-1:2015      Luminaires – Part 1: General requirements and tests


## In Conformity with

LVD                      Low voltage directive 2014/35/EU  
EMC                     Electromagnetic compatibility directive 2014/30/EU  
ERP                      Energy related products directive 2009/125/EC  
RoHS                    Restriction of hazardous substances 2011/65/EU


# Product Dimensions

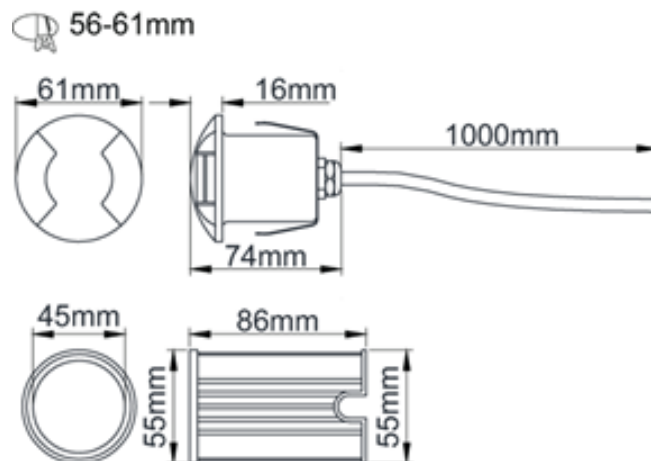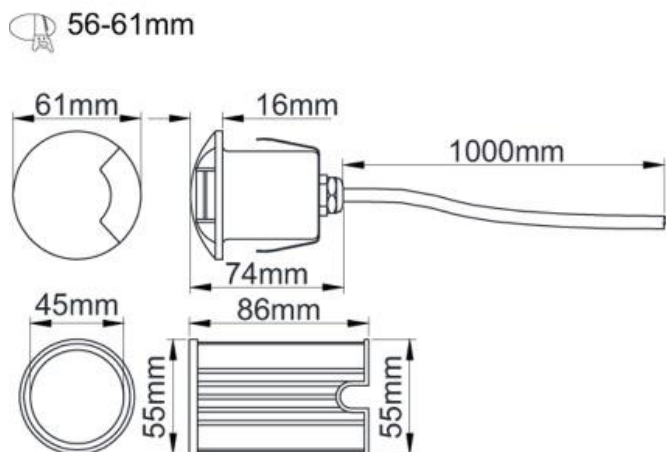

## KSR1370 & KSR1374

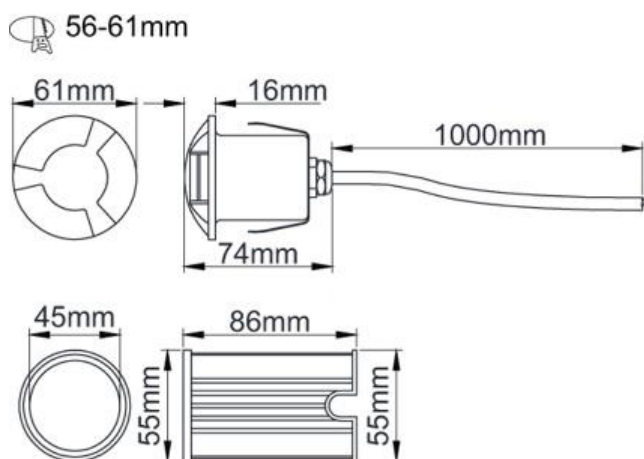

## KSR1371 & KSR1375

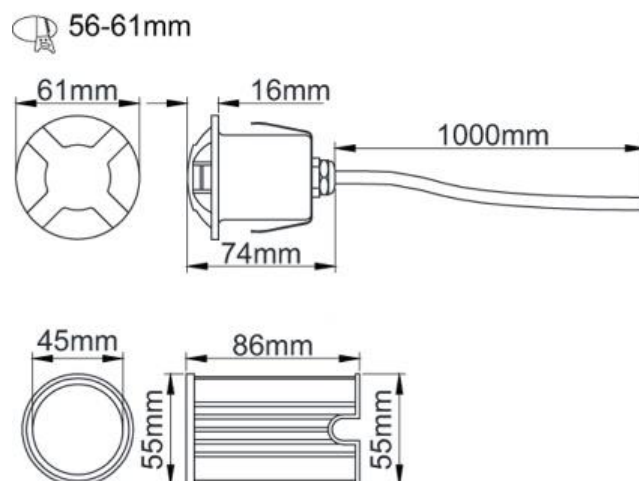

## KSR1372 & KSR1376

## KSR1373 & KSR1377

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.