
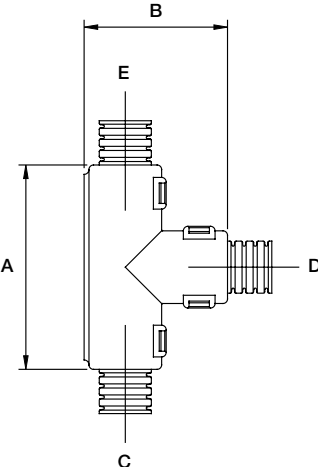


Non-metallic conduit systems

Accessories - Type T, Hinged 'T' Piece

Type T

Hinged 'T' piece / Materials: Polyamide (nylon) 66 / Colour: Black (BL)

	Part no.	Nominal dimensions / conduit size (mm)					
		A	B	C	D	E	
	10T	T101010/BL	45.2	31.1	10	10	10
		T101310/BL	45.2	31.1	10	13	10
		T101613/BL	45.2	31.1	10	16	13
	13T	T131010/BL	45.2	31.1	13	10	10
		T131013/BL	45.2	31.1	13	10	13
		T131310/BL	45.2	31.1	13	13	10
		T131313/BL	45.2	31.1	13	13	13
		T131613/BL	45.2	31.1	13	13	16
		T131616/BL	45.2	31.1	13	16	13
	16T	T161013/BL	49.1	34.8	16	10	13
		T161313/BL	49.1	34.8	16	13	13
		T161316/BL	49.1	34.8	16	13	16
		T161613/BL	49.1	34.8	16	16	13
		T161616/BL	49.1	34.8	16	16	16
		T162113/BL	49.1	34.8	16	21	13
		T162116/BL	49.1	34.8	16	21	16
	21T	T211016/BL	56.5	41.0	21	10	16
		T211021/BL	56.5	41.0	21	10	21
		T211316/BL	56.5	41.0	21	13	16
		T211321/BL	56.5	41.0	21	13	21
		T211613/BL	56.5	41.0	21	16	13
		T211616/BL	56.5	41.0	21	16	16
		T211621/BL	56.5	41.0	21	16	21
		T212113/BL	56.5	41.0	21	21	13
		T212116/BL	56.5	41.0	21	21	16
		T212121/BL	56.5	41.0	21	21	21
	28T	T281021/BL	64.5	48.5	28	10	21
		T281028/BL	64.5	48.6	28	10	28
		T281321/BL	64.5	48.6	28	13	21
		T281328/BL	64.5	48.6	28	13	28
		T281621/BL	64.5	48.6	28	16	21
		T281628/BL	64.5	48.6	28	16	28
		T282121/BL	64.5	48.6	28	21	21
		T282128/BL	64.5	48.6	28	21	28
		T282828/BL	64.5	48.6	28	28	28
		T282828/BL	64.5	48.6	28	28	28
	34T	T341634/BL	72.0	55.3	34	16	34
		T342128/BL	72.0	55.3	34	21	28
		T342134/BL	72.0	55.3	34	21	34
		T343434/BL	72.0	55.3	34	34	34

Approvals



IP rating

Appropriate conduit

For use with: Type PA / PR / PF

IP40	Yes
IP65	N/A
IP66	N/A
IP67	N/A
IP68	N/A
IP69	N/A

Temperature range

Static applications: -40°C to +120°C

Moving applications: -5°C to +120°C

Fitting characteristics

Snap fit