



ADLED2/WV/CCT/M3

Delta LED CCT Emergency 14W - White / Visiluxe



Features

All polycarbonate multi-purpose LED round bulkhead

LED performance exceeds CFL equivalents

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

LED lifespan L70 56,000 hours

General Information

| | |
|--------------------------------|--|
| Lamp Type | LED |
| Colour / Finish | White / Visiluxe |
| Emergency | Yes |
| IP Rating | IP65 |
| IK Rating | IK09 |
| Class Protection | 1 |
| Internal / External | Internal/External |
| Surface / Recessed / Suspended | Surface |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter (mm) | 260 |
| Depth (mm) | 65 |
| Accessories | ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W |


Technical Information

| | |
|------------------|--|
| Wattage | 14W |
| Lumens Delivered | 1271lm (Cool White), 1190lm (Warm White) |
| Lm/W | 91lm (Cool White), 85lm (Warm White) |
| CRI | Ra 80 |
| CCT | 3000/4000K |
| Input | 230V |
| Hertz | 50Hz |
| Operating Temp | -10°C to 25°C |


Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

| | |
|---------------------------------|-------------|
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for built-in mounting | No |
| Suitable for surface mounting | Yes |
| With light source | Yes |
| Suitable for number of lamps | 1 |
| Material housing | Plastic |
| Colour housing | White |
| Nominal voltage | 230-230 V |
| Control gear included | Yes |
| Degree of protection (IP) | IP65 |
| Impact strength | IK09 |
| Protection class | I |
| Suitable for emergency lighting | Yes |
| With movement sensor | No |
| With light sensor | No |
| Max. system power | 14 W |
| Colour of light | White |
| Colour temperature | 3000-4000 K |
| Colour rendering index CRI | 80-89 |
| Height/depth | 65 mm |
| Length | 260 mm |

Datasheet generated from <https://onetimepim.com> last updated Tuesday, June 23, 2020 10:35:31 AM

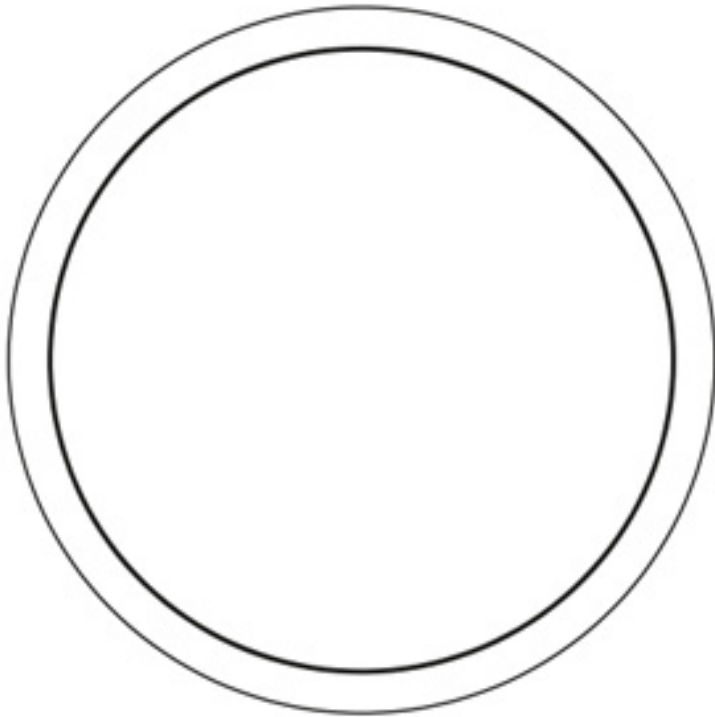

260

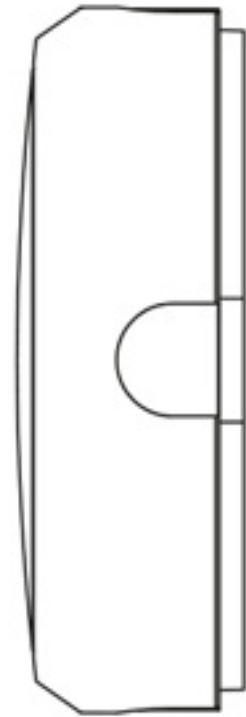

65