



AOXLED5/M3

Oxford LED Surface Linear Emergency 34W - Cool White



Features

Modern fully enclosed surface luminaire with curved low profile appearance

This is a widely used style of fitting within the educational sector

Steel body with polycarbonate diffuser and plastic end caps

34W exceeds performance of 1x49W T5

LED lifespan L70 54,000 hours

General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
IP Rating	IP40
IK Rating	IK07
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1470
Width (mm)	165
Height (mm)	70

Technical Information

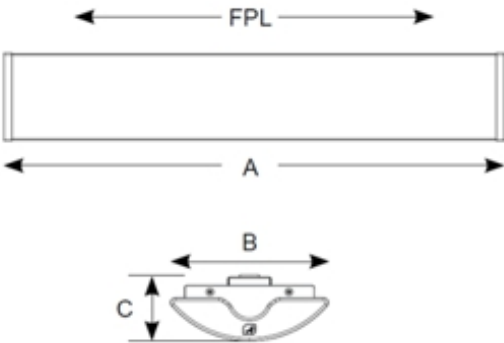
Wattage	34W
Lumens Delivered	3668lm
Lm/W	108lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Material housing	Steel
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Diffuser lens/optic/panel
Degree of protection (IP)	IP40
Impact strength	IK07
Protection class	I
Suitable for emergency lighting	Yes
With movement sensor	No
With light sensor	No
Max. system power	34 W
Rated luminous flux acc. IEC 62722-2-1	3668 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	108 lm/W
Width	165 mm
Height/depth	70 mm

Length

1470 mm

	Code	A	B	C	FPL
	AOXLED4	1190	165	70	1084
	AOXLED5	1470	165	70	1384
	AOXLED2X4	1190	165	70	1084
	AOXLED2X5	1470	165	70	1364

Datasheet generated from <https://onetimepim.com> last updated Tuesday, June 23, 2020 10:42:25 AM