



AALED2/WV/CCT/MWS



Features

All polycarbonate multi-purpose LED square bulkhead

LED performance exceeds CFL equivalents

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

LED lifespan L70 56,000 hours


General Information

| | |
|--------------------------------|-------------------|
| Lamp Type | LED |
| Colour / Finish | White / Visiluxe |
| Integral Microwave Sensor | Yes |
| IP Rating | IP65 |
| IK Rating | IK09 |
| Class Protection | 1 |
| Internal / External | Internal/External |
| Surface / Recessed / Suspended | Surface |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Length (mm) | 260 |
| Width (mm) | 260 |
| Depth (mm) | 75 |


Technical Information

| | |
|------------------|--|
| Wattage | 14W |
| Lumens Delivered | 1269lm (Cool White), 1170lm (Warm White) |
| Lm/W | 91lm (Cool White), 84lm (Warm White) |
| CRI | Ra 80 |
| CCT | 3000/4000K |
| Input | 230V |
| Hertz | 50Hz |
| Operating Temp | -10°C to 25°C |

Datasheet generated from <https://onetimepim.com> last updated Friday, March 26, 2021 11:29:15 AM

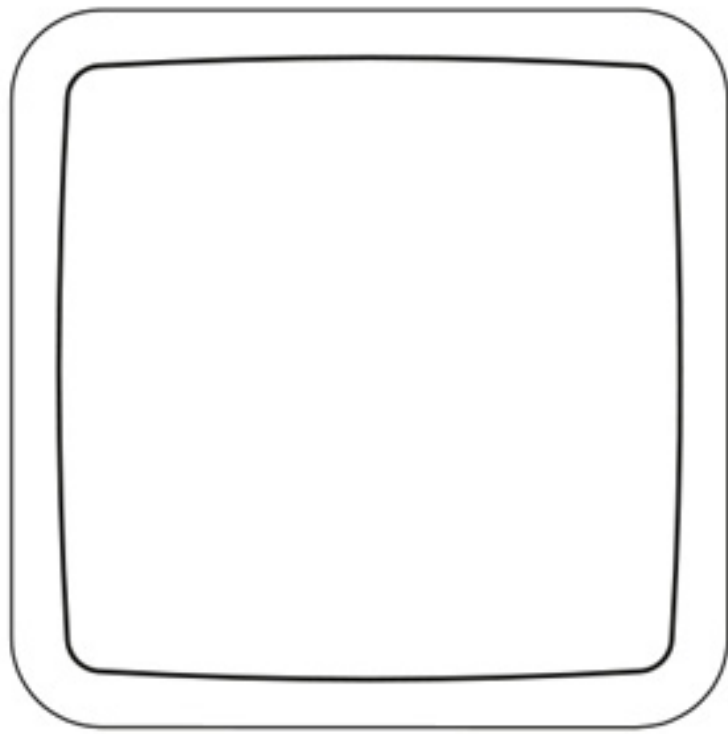

260

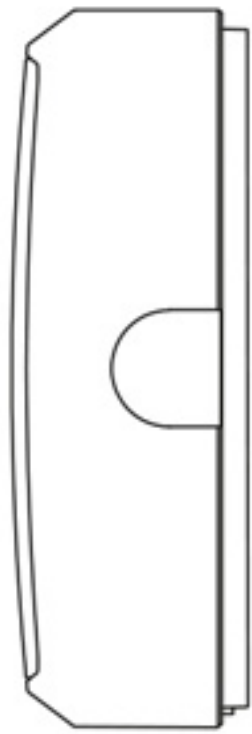

75