



AZPELED/1/M3



Features

Robust LED low/high bay for industrial, commercial and retail applications

Die-cast powder coated construction and heatsink for optimum thermals and performance

Alternative installation options by means of drop rods, jack chain and catenary wire. Bracket accessories available for ceiling or wall mounting

100W exceeds performance of 150W HQI

High specification IP65 and IK08 ratings

Pre-wired with 3M of H07RN-F cable for ease and speed of installation

LED lifespan L80 B10 54,000 hours

1-10V dimmable as standard



General Information

Lamp Type	LED
Emergency	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface/Suspended
LED Life	L80 B10 54,000hrs
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	308
Depth (mm)	169.5
Accessories	AZPELED/FB1, AZPELED/REF

Technical Information

Wattage	100W
Lumens Delivered	15250lm
Lm/W	152lm
CRI	Ra 80
CCT	4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-30°C to 45°C

Datasheet generated from <https://onetimepim.com> last updated Tuesday, April 6, 2021 10:48:34 AM

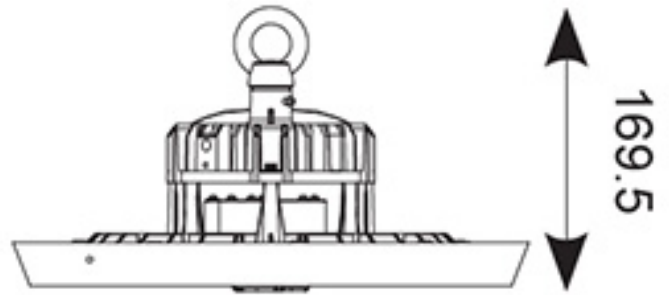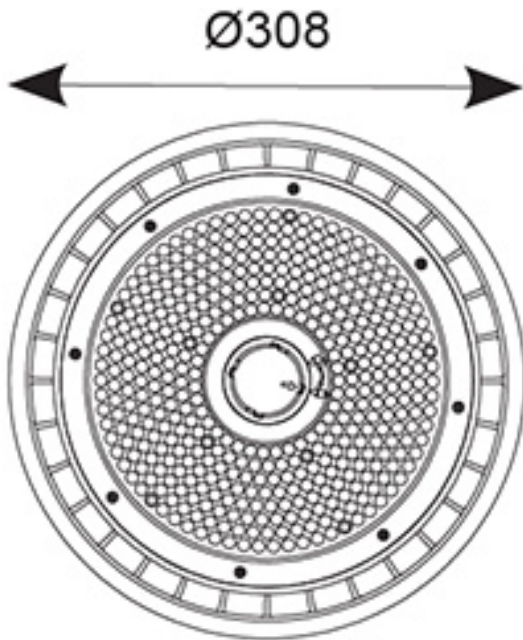

AZPELED/1