


OSRAM DULUX® T/E PLUS
CFLni, 3 tubes, with 4-pin base for ECG operation

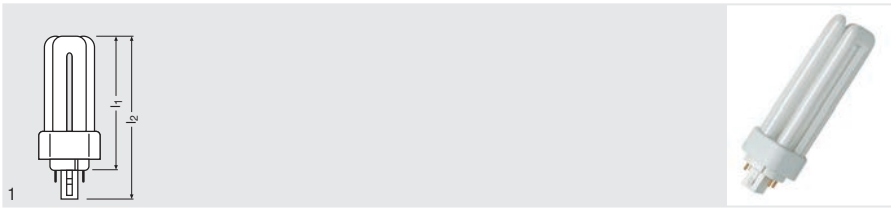

Product name	GTIN (EAN)	W			lm 25°C
DULUX T/E PLUS 13 W/827	4050300447001	13	LUMILUX INTERNA	GX24q-1	900
DULUX T/E PLUS 13 W/830	4050300446981	13	LUMILUX Warm White	GX24q-1	900
DULUX T/E PLUS 13 W/840	4050300446967	13	LUMILUX Cool White	GX24q-1	900
DULUX T/E PLUS 18 W/827 ¹⁾	4050300342269	18	LUMILUX INTERNA	GX24q-2	1200
DULUX T/E PLUS 18 W/830 ¹⁾	4050300342245	18	LUMILUX Warm White	GX24q-2	1200
DULUX T/E PLUS 18 W/840 ¹⁾	4050300342221	18	LUMILUX Cool White	GX24q-2	1200
DULUX T/E PLUS 26 W/827 ¹⁾	4050300342320	26	LUMILUX INTERNA	GX24q-3	1800
DULUX T/E PLUS 26 W/830 ¹⁾	4050300342306	26	LUMILUX Warm White	GX24q-3	1800
DULUX T/E PLUS 26 W/840 ¹⁾	4050300342283	26	LUMILUX Cool White	GX24q-3	1800
DULUX T/E PLUS 32 W/827 ¹⁾	4050300348605	32	LUMILUX INTERNA	GX24q-3	2400
DULUX T/E PLUS 32 W/830 ¹⁾	4050300348582	32	LUMILUX Warm White	GX24q-3	2400
DULUX T/E PLUS 32 W/840 ¹⁾	4050300348568	32	LUMILUX Cool White	GX24q-3	2400
DULUX T/E PLUS 42 W/827 ¹⁾	4050300425665	42	LUMILUX INTERNA	GX24q-4	3200
DULUX T/E PLUS 42 W/830 ¹⁾	4050300425641	42	LUMILUX Warm White	GX24q-4	3200
DULUX T/E PLUS 42 W/840 ¹⁾	4050300425627	42	LUMILUX Cool White	GX24q-4	3200

Product name	R _a	h max. [mm]			
DULUX T/E PLUS 13 W/827	80...89	90	A	10	1
DULUX T/E PLUS 13 W/830	80...89	90	A	10	1
DULUX T/E PLUS 13 W/840	80...89	90	A	10	1
DULUX T/E PLUS 18 W/827 ¹⁾	80...89	101	A	10	1
DULUX T/E PLUS 18 W/830 ¹⁾	80...89	101	A	10	1
DULUX T/E PLUS 18 W/840 ¹⁾	80...89	101	A	10	1
DULUX T/E PLUS 26 W/827 ¹⁾	80...89	116	A	10	1
DULUX T/E PLUS 26 W/830 ¹⁾	80...89	116	A	10	1
DULUX T/E PLUS 26 W/840 ¹⁾	80...89	116	A	10	1
DULUX T/E PLUS 32 W/827 ¹⁾	80...89	132	A	10	1
DULUX T/E PLUS 32 W/830 ¹⁾	80...89	132	A	10	1
DULUX T/E PLUS 32 W/840 ¹⁾	80...89	132	A	10	1
DULUX T/E PLUS 42 W/827 ¹⁾	80...89	153	A	10	1
DULUX T/E PLUS 42 W/830 ¹⁾	80...89	153	A	10	1
DULUX T/E PLUS 42 W/840 ¹⁾	80...89	153	A	10	1

1) For ECG operation only



Product features

- Average life: 20,000 h (with QUICKTRONIC®)
- Color rendering index R_a : 80...89
- Dimmable (3...100 %)
- Short and compact pin-base lamp with triple-turn tubes
- Single-ended four-pin plug-in GX24q base with shortened base casing

Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industrial lighting
- Outdoor applications only in suitable luminaires

Equipment / Accessories

- Suitable for operation on electronic control gears

References / Links

For more information on QUICKTRONIC® electronic control gears, go to www.ledvance.com/quicktronic

Safety advice

In case of lamp breakage:
www.ledvance.com/sustainability



Technical data

Lamp OSRAM DULUX® Wattage	Lamp voltage		Lamp current		System wattage ECG mode*	Lumi- nance cd/cm ² LF 827, 830, 840	PF correction Parallel capac- itor ¹⁾ CCG mode 230 V/50 Hz µF	Series capac- itor ²⁾ CCG mode µF
	at 50/60 Hz V	at HF mode V	at 50/60 Hz mA	at HF mode mA				
CFL SQUARE 16	103	84	195	180	–	–	2.0	–
CFL SQUARE 28	108	95	320	260	–	–	3.0	–
CFL SQUARE 38	110	97	430	355	–	–	4.5	–
DULUX S 5	35	–	180	–	–	2.5	2.2	–
DULUX S 7	47	–	175	–	–	2.6	2.1	–
DULUX S 9	60	–	170	–	–	2.8	2.0	–
DULUX S 11	91	–	155	–	–	2.7	1.7	–
DULUX D 10	64	–	190	–	–	4.0	2.2	–
DULUX D 13	91	–	175	–	–	4.0	1.8	–
DULUX D 18	100	–	220	–	–	4.5	2.2	1.7
DULUX D 26	105	–	325	–	–	5.5	3.2	2.5
DULUX T 13	91	–	175	–	–	4.2	1.8	1.4
DULUX T 18	100	–	225	–	–	4.7	2.3	1.7
DULUX T 26	105	–	325	–	–	6.0	3.3	2.5
DULUX S/E 7	–	37	–	175	9	2.6	–	–
DULUX S/E 9	–	48	–	170	12	2.8	–	–
DULUX S/E 11	–	75	–	150	14	2.7	–	–
DULUX D/E 10	–	51	–	190	12	4.0	–	–
DULUX D/E 13	–	77	–	165	14	4.0	–	–
DULUX D/E 18 ³⁾	–	80	–	210	20	4.5	–	–
DULUX D/E 26 ³⁾	–	80	–	300	28	5.5	–	–
DULUX T/E 13	–	77	–	165	14	4.2	–	–
DULUX T/E 18	–	80	–	210	20	4.7	–	–
DULUX T/E 26 ⁴⁾	–	80	–	300	28	6.0	–	–
DULUX T/E 32 ³⁾⁴⁾	–	100	–	320	35	6.5	–	–
DULUX T/E 42 ³⁾⁴⁾	–	135	–	320	46	7.0	–	–
DULUX L 18 ³⁾⁵⁾	58	50	375	320	19	2.1	4.2	2.7
DULUX L 24 ³⁾⁵⁾	87	75	345	300	27	2.1	3.6	2.7
DULUX L 36 ³⁾⁵⁾	106	90	435	360	39	2.8	4.4	3.4
DULUX L 40 ⁴⁾	–	126	–	320	45	2.3	–	–
DULUX L 55 ³⁾⁴⁾	–	101	–	550	61	3.2	–	–
DULUX L 80 ⁴⁾	–	145	–	555	86	3.2	–	–
DULUX L DE LUXE 36	106	90	435	360	39	2.3	4.4	3.4
DULUX L DE LUXE 55	–	101	–	550	61	2.7	–	–
DULUX L HE 26 W	–	157	–	170	30	**	–	–
DULUX L HE 28 W	–	147	–	190	31	1.9	–	–
DULUX F 18	58	50	375	320	19	2.4	4.2	2.7
DULUX F 24	87	75	345	300	27	2.5	3.6	2.7
DULUX F 36	106	90	435	360	39	3.0	4.4	3.4

* ECG also available in two-lamp version

** Under clarification

For QUICKTRONIC® electronic control gears, see Section 16
For detailed technical information, see the "Technical Guides"



1) Design for cos phi = 0.95, dielectric strength of the capacitors 250 V_{ac}, capacitance tolerance ±10 %
2) To maintain the specified operating and preheating values, close-tolerance capacitors (±2 %) and series reactors (±1.5 %) are required for series compensation. Check the product ranges of leading manufacturers | Dielectric strength of the capacitors 450 V_{AC}

3) Also applies to the XT version







4) Also applies to the CONSTANT version

5) Also applies to the SP version at +5 °C

For more system information, see Section 16 (ECGs)

Technical data

Lamp Wattage

						
	Base	Length I max.	Length acc. to IEC I max.	Length I ₁ max.	Length I ₂ max.	Length acc. to IEC I ₁ max.
DULUX S 5	G23	–	–	85	108	85
DULUX S 7	G23	–	–	114	137	115
DULUX S 9	G23	–	–	144	167	145
DULUX S 11	G23	–	–	214	237	215
DULUX S/E 7	2G7	114	115	–	–	–
DULUX S/E 9	2G7	144	145	–	–	–
DULUX S/E 11	2G7	214	215	–	–	–
DULUX D 10	G24d-1	–	–	87	110	95
DULUX D 13	G24d-1	–	–	115	138	130
DULUX D 18	G24d-2	–	–	130	153	140
DULUX D 26	G24d-3	–	–	149	172	160
DULUX D/E 10	G24q-1	–	–	87	103	95
DULUX D/E 13	G24q-1	–	–	115	131	130
DULUX D/E 18 ¹⁾	G24q-2	–	–	130	146	140
DULUX D/E 26 ¹⁾	G24q-3	–	–	149	165	160
DULUX T PLUS 13	GX24d-1	–	–	90	113	90
DULUX T PLUS 18	GX24d-2	–	–	101	124	110
DULUX T PLUS 26	GX24d-3	–	–	116	139	130
DULUX T/E PLUS 13	GX24q-1	–	–	90	106	90
DULUX T/E PLUS 18	GX24q-2	–	–	101	117	110
DULUX T/E PLUS 26	GX24q-3	–	–	116	132	130
DULUX T/E PLUS 32 ²⁾	GX24q-3	–	–	132	148	145
DULUX T/E PLUS 42 ²⁾	GX24q-4	–	–	153	169	155
DULUX T/E CONSTANT 26	GX24q-3	–	–	112	128	130
DULUX T/E CONSTANT 32	GX24q-3	–	–	128	144	145
DULUX T/E CONSTANT 42	GX24q-4	–	–	149	165	155
DULUX L 18 ¹⁾	2G11	217	225	–	–	–
DULUX L 24 ¹⁾	2G11	317	320	–	–	–
DULUX L 36 ¹⁾	2G11	411	415	–	–	–
DULUX L 40 ³⁾	2G11	533	535	–	–	–
DULUX L 55 ¹⁾³⁾	2G11	533	535	–	–	–
DULUX L 80 ³⁾	2G11	565	565	–	–	–
DULUX L SP 18	2G11	209	225	–	–	–
DULUX L SP 24	2G11	309	320	–	–	–
DULUX L HE 26	2GX11	533	u.c.	–	–	–
DULUX L HE 28	2GX11	565	565	–	–	–
DULUX F 18	2G10	122	122	–	–	–
DULUX F 24	2G10	165	165	–	–	–
DULUX F 36	2G10	217	217	–	–	–

	A in mm	B in mm	C in mm	D in mm	E in mm	F in mm	G in mm
CFL SQUARE 16	max. 138.0	max. 141.0	max. 9.9	max. 4.5	max. 42.0	max. 33.0	57.0
CFL SQUARE 28	max. 205.0	max. 207.0	max. 9.9	max. 4.5	max. 42.0	max. 33.0	93.0
CFL SQUARE 38	max. 205.0	max. 207.0	max. 9.9	max. 4.5	max. 42.0	max. 33.0	93.0

For details of the geometry and diagram, see "CFLni Technical Guide"




1) Also applies to the XT version
2) Also applies to T/E XT


3) Also applies to the CONSTANT version

Spectral power distribution of OSRAM LUMILUX® pin-base lamps


Visible range from 380 to 780 nm, relative spectral emission per 5 nm.




Color 954 LUMILUX®
DE LUXE Daylight




Color 940 LUMILUX®
DE LUXE Cool White




Color 930 LUMILUX®
DE LUXE Warm White




Color 865 LUMILUX®
Cool Daylight




Color 840 LUMILUX®
Cool White



Color 835 LUMILUX®
White




Color 830 LUMILUX®
Warm White



Color 827 LUMILUX
INTERNA®




Light colors and color rendering properties according to EN 12464-1/DIN 5035 for OSRAM DULUX® pin-base lamps

				
Class 1	1 A	954 LUMILUX® DE LUXE	940 LUMILUX® DE LUXE	930 LUMILUX® DE LUXE
Very good	R _a 90 ... 99	Daylight	Cool White	Warm White
		5400 K	4000 K	3000 K
	1 B	865 LUMILUX®	840 LUMILUX®	835 LUMILUX®
Good	R _a 80 ... 89	Cool Daylight	Cool White	White
		6500 K	4000 K	3500 K
				830 LUMILUX® Warm White
				3000 K
				827 LUMILUX INTERNA®
				2700 K

For an explanation of light colors, see page 9.40 ff.




Circuit diagrams for conventional control gears



1

Single lamp with control gear


OSRAM DULUX® S 5 W, 7 W, 9 W, 11 W
 OSRAM DULUX® D 10 W, 13 W, 18 W, 26 W
 OSRAM DULUX® D ES 16 W, 23 W
 OSRAM DULUX® T 13 W, 18 W, 26 W



2

Single lamp with plug-in control gear


OSRAM DULUX® S 5 W, 7 W, 9 W, 11 W
 OSRAM DULUX® D 10 W, 13 W
 OSRAM DULUX® T 13 W



3

Series connection with control gear


OSRAM DULUX® S 5 W, 7 W, 9 W



4

Single circuit, starter St 111
 or DEOS® St 171

OSRAM DULUX® L 18 W, 24 W, 36 W
 OSRAM DULUX® L 18 W SP, 24 W SP, 36 W SP
 OSRAM DULUX® F 18 W, 24 W, 36 W



5

Series operation on 230 V only
 with starter St 151

OSRAM DULUX® L 18 W
 OSRAM DULUX® L 18 W SP
 OSRAM DULUX® F 18 W


F = Four-pin holder
 St = Starter
 U_n = Line voltage
 V = Control gear

For circuit diagrams for HF operation, see Section 16.




Bases IEC/EN 60061-1


For choke/starter operation

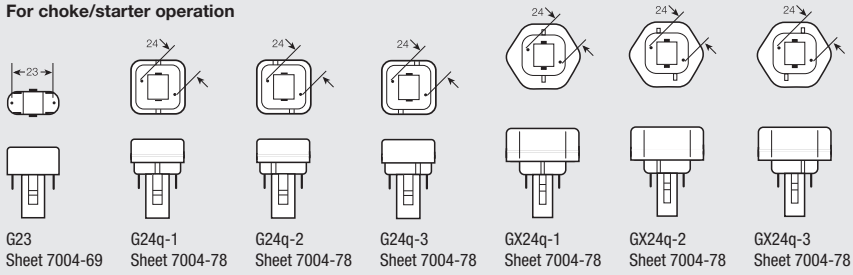


For HF operation

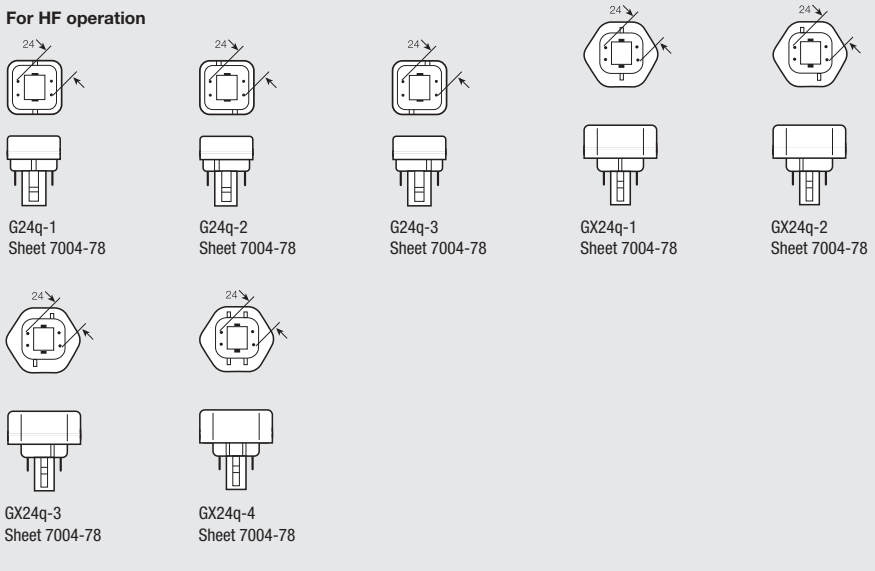

For HF operation

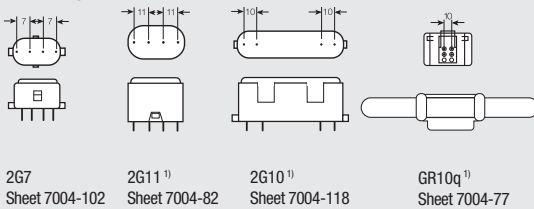

For choke/starter operation



1) Also for choke/starter operation