


CB2

Metal Switch & Socket Box

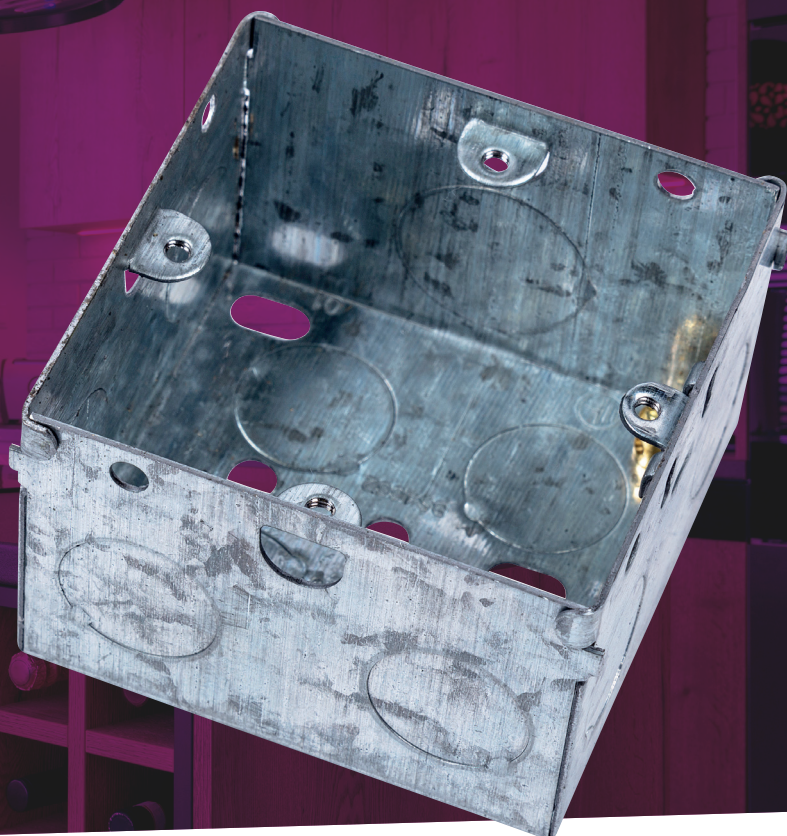

47mm 1 gang fitted with
1 adjustable & 3 fixed lugs

Technical Specifications

Supply Voltage	230/240V ~ 50Hz
Switching Rating	16A Resistive / 6A Inductive
Switching Operations	96 per 24 hours at 15 minute intervals
Ambient Temperature	-10 °C to 50 °C

Technical Drawing

