

FX250+ - FX RANGE

Description:

These FX Feet are a practical and versatile support solution for supporting your services, suitable for mounting air conditioning units, solar thermal and solar photovoltaic on flat roofs.

Standard:

BS7188:1989+A1:2009 and
BS 3N1176-7:2008

Material:

SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer.
Pre galvanised Metal channel recessed into the top face.



Additional Notes:


FX Feet are available in 4 sizes - all listed below.

OTHER ADDITIONAL INFORMATION

| Product Code | Height (mm) | Width (mm) | Length (mm) | Max loading per foot (Kg) |
|--------------|-------------|------------|-------------|---------------------------|
| FX250 | 95 | 180 | 250 | 1000 |
| FX400 | 95 | 180 | 400 | 1000 |
| FX600 | 95 | 180 | 600 | 1000 |
| FX1000 | 95 | 180 | 1000 | 1000 |

Material Specification:

The feet have a 40mm x 20mm Pre Galvanised channel recessed into the top face allowing you to use standard strut fixings to secure your services to the feet. This product is suitable for pipe work and cable runs.

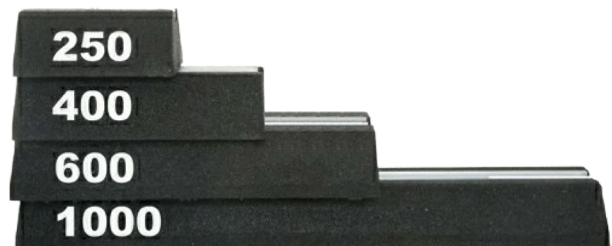

Working Conditions:

Suitable for internal or external applications in temperatures between -40°C to +80°C. BSEN60068-2-14