



LUXOMAT® LC-Mini 180



white



black

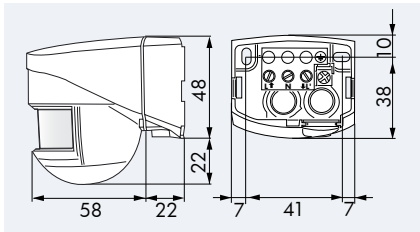

► Wiring diagrams on page 128, 130!

TECHNICAL DATA


- 230 V~ ±10%
- 180°
- max. 10 m when walking across (tangential)
- IP44 / Class II / C E
- L80 x W55 x H70 mm
- 25°C to +50°C
- Housing UV- and shock-resistant Polycarbonate

Channel 1 (light control)

- 1000 W, cos φ = 1
- 4 sec. - 10 min.
- 2 - 2000 Lux

PRODUCT INFORMATION

- Mini-Motion detector with detection area of 180°
- Spherical head adjustable in two levels
- Range adjustable by moving the sensor-head
- The detection area can be altered by blinds, which are included. The blinds can be clipped-on and moved to stop unwanted detection.
- Adjustment light level and time setting by screwdriver and potentiometers at the bottom of the sensor head infinitely variable
- Wall mounting
- **Application examples:** monitoring for narrow premises, ways, gateways or at door sills

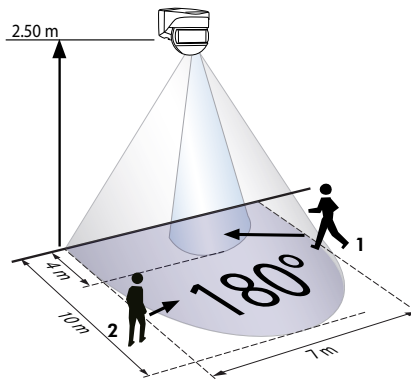

- 1 ■ Walking towards
- 2 ■ Walking across

ACCESSORY (OPTIONAL)

Wire basket



Blinds
see page 20!

Arc extinction kit
see page 20!

Description	Colour	Part number
LC-Mini 180	white	91052
LC-Mini 180	black	91072
Accessory (optional)		
Wire basket BSK	white	92467