



Attributes


Primary Range Insrt Plate material Size (double) height Size (double) width Size (double) depth Box fixing hole centres Minimum wall box depth Current rating Voltage

Max load

IP rating Switched Poles Contact Gap Minimum Terminal Capacity 1 **Terminal Capacity 2 Terminal Capacity 3 Terminal Capacity 4 Terminal Capacity 5** Earth Terminal Capacity 1 Earth Terminal Capacity 2 Earth Terminal Capacity 3 4 x 2.5mm2 Earth Terminal Capacity 4 2 x 4mm2 Multi-Strand Earth Terminal Capacity 5 1 x 6mm2 Product Class 1 Ambient Operating Temperature **Recommended Location** Max installation Altitude **BS EN ISO Standard** Additional Notes : Patents And Trademarks

Cheriton Victorian SHS Metal 146mmV 86mm 8.5mm 120.6mm Vertical 47mm 20VA 220/250V AC 200/250V input; 115/230V 20VA output IP2XD none none 5 x 1mm2 4 x 1.5mm2 3 x 2.5mm2 2 x 4mm2 Multi-Strand 1 x 6mm2 9 x 1mm2 6 x 1.5mm2 Must be earthed -5° to +40°C Indoor use only 2000m BS EN 61558 - BS 4573 Must be mounted vertically

Trade Mark No. 2344779

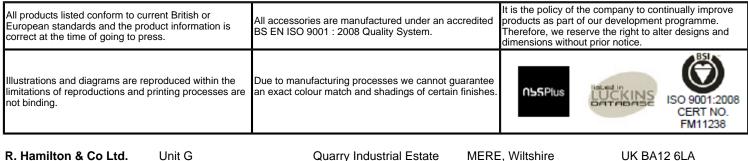

R. Hamilton & Co Ltd. Tel: +44 (0)1747 860088 Unit G Fax: +44 (0)1747 861032

Quarry Industrial Estate Email: info@hamilton-litestat.com

UK BA12 6LA Web: www.hamilton-litestat.com