
€ C C C C C C C C C C C C C C C C C C C

Order Code : 92 DP PB-W Cheriton Victorian Polished Brass 1 gang 20AX Double Pole Rocker. Standard Insert will be Polished Brass with a White surround. Attributes

Primary Range Cheriton Victorian DP Insrt Plate material Metal Size (single) height 88mm Size (single) width 88mm Size (single) depth 8.5mm Box fixing hole centres 60.3mm Grid fixing hole centres Minimum wall box depth 25mm Current rating 20AX Voltage Max load IP rating IP2XD Switched Poles Double Contact Gap Minimum 3mm **Terminal Capacity 1 Terminal Capacity 2 Terminal Capacity 3** 1 x 6mm2 Earth Terminal Capacity 1 6 x 1mm2 Earth Terminal Capacity 2 5 x 1.5mm2 Earth Terminal Capacity 3 Earth Terminal Capacity 4 Earth Terminal Capacity 5 1 x 6mm2 Product Class 1 Ambient Operating Temperature **Recommended Location** Max installation Altitude 2000m **BS EN ISO Standard** BS EN 60669-1 Patents And Trademarks Trade Mark No. 2344779

Grid fixing inserts are available on Cheriton Victorian plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue 220/250V AC 20 Amp inductive 3 x 2.5mm2 2 x 4mm2 Multi-Strand 3 x 2.5mm2 2 x 4mm2 Multi-Strand Must be earthed -5° to +40°C Indoor use only

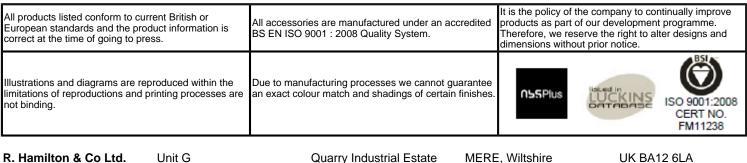

R. Hamilton & Co Ltd. Tel: +44 (0)1747 860088 Unit G Fax: +44 (0)1747 861032 **Quarry Industrial Estate** Email: info@hamilton-litestat.com

UK BA12 6LA Web: www.hamilton-litestat.com