


## Order Code : 94 R22 SB-W Cheriton Victorian Satin Brass 2 gang 2 Way 10AX Rocker. Standard Insert will be Satin Brass with a White surround.

## Attributes

Primary Range Insrt R22 Plate material Metal Size (single) height 88mm Size (single) width 88mm Size (single) depth 8.5mm Box fixing hole centres 60.3mm Grid fixing hole centres Minimum wall box depth 25mm Current rating 10AX Voltage Max load IP rating IP2XD Switched Poles Single Contact Gap Minimum 3mm **Terminal Capacity 1** 5 x 1mm2 **Terminal Capacity 2** 4 x 1.5mm2 Terminal Capacity 3 1 x 2.5mm2 **Terminal Capacity 4 Terminal Capacity 5** 1 x 6mm2 Earth Terminal Capacity 1 5 x 1mm2 Earth Terminal Capacity 2 4 x 1.5mm2 Earth Terminal Capacity 3 3 x 2.5mm2 Earth Terminal Capacity 4 Earth Terminal Capacity 5 1 x 6mm2 Product Class 1 Ambient Operating Temperature **Recommended Location** Max installation Altitude 2000m **BS EN ISO Standard** Patents And Trademarks

Cheriton Victorian Grid fixing inserts are available on Cheriton Victorian plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue 220/250V AC 10 Amp inductive 1 x 4mm2 Multi-Strand 1 x 4mm2 Multi-Strand Must be earthed -5° to +40°C Indoor use only BS EN 60669-1 Trade Mark No. 2344779

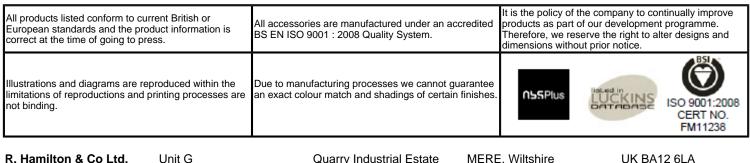

R. Hamilton & Co Ltd. Tel: +44 (0)1747 860088 Unit G Fax: +44 (0)1747 861032 **Quarry Industrial Estate** Email: info@hamilton-litestat.com

UK BA12 6LA Web: www.hamilton-litestat.com