| Nor Or Control |
|--|


Order Code : 92 FOC PB-B

Cheriton Victorian Polished Brass 1 gang 13A Fuse + Cable Outlet. Standard Insert will be Polished Brass with a Black surround.

Attributes

Primary Range FOC Insrt Plate material Metal Size (single) height 88mm Size (single) width 88mm Size (single) depth 8.5mm Box fixing hole centres 60.3mm Grid fixing hole centres Minimum wall box depth 35mm Current rating 13 Amp Voltage Max load 13 Amp IP rating IP2XD Switched Poles none Contact Gap Minimum none **Terminal Capacity 1** 5 x 1mm2 **Terminal Capacity 2** 4 x 1.5mm2 **Terminal Capacity 3** 3 x 2.5mm2 **Terminal Capacity 4 Terminal Capacity 5** 1 x 6mm2 Earth Terminal Capacity 1 6 x 1mm2 Earth Terminal Capacity 2 5 x 1.5mm2 Earth Terminal Capacity 3 3 x 2.5mm2 Earth Terminal Capacity 4 Earth Terminal Capacity 5 1 x 6mm2 Product Class 1 Ambient Operating Temperature **Recommended Location** Max installation Altitude 2000m **BS EN ISO Standard** BS 1363-4 0.75mmÂ² Cable outlet (min) 2.5mmÂ² Cable outlet (max) Patents And Trademarks Trade Mark No. 2344779

Cheriton Victorian Grid fixing inserts are available on Cheriton Victorian plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue 220/250V AC 1 x 4mm2 Multi-Strand 2 x 4mm2 Multi-Strand Must be earthed -5° to +40°C Indoor use only

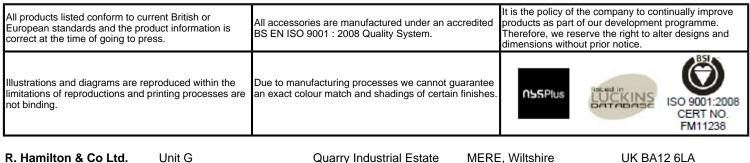

R. Hamilton & Co Ltd. Tel: +44 (0)1747 860088

Fax: +44 (0)1747 861032

Quarry Industrial Estate Email: info@hamilton-litestat.com

UK BA12 6LA Web: www.hamilton-litestat.com