

ROBUS®

FLEXI-STRIPS

VEGAS LONG RUN

4.8W/m, 24V, IP20, IP67



PRODUCT INFORMATION DOCUMENT

FEATURES

- Unique design of the strip allows maximum 30m runs without voltage drop and necessity to use amplifiers
- IP20 and IP67 versions for indoor and outdoor applications
- Can be cut every 6 LEDs and reconnected as required. Cut-And-Connect service available through our Emergency Conversions Unit
- Chose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories

CONSTRUCTION

- FPC copper substrate PCB
- 500mm 2x18AWG input wires



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



CCT



BEAM ANGLE



IP RATING



DIMMING



OPERATING VOLTAGE



SAFETY CLASS

Product Code:	RVAL5242030-30	RVAL5242030-40	RVAL5246730-30	RVAL5246730-40
Comparable to:	NA	NA	NA	NA
Total Power (W):	4.8	4.8	4.8	4.8
Power Factor:	NA	NA	NA	NA
Total Light Output (lm):	540	570	480	520
Total Emergency Light Output (lm):	NA	NA	NA	NA
Efficacy (lm/cctW):	113	119	100	104
Lux at 1m (lux):	180	180	130	140
Emergency Lux at 1m (lux):	NA	NA	NA	NA
CCT (K):	3000	4000	3000	4000
CRI:	80	80	80	80
IP:	20	20	67	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA	NA	NA
RG Value:	0	0	0	0
SDCM:	6	6	6	6
P _{ST} LM:	NA	NA	NA	NA
SVM:	NA	NA	NA	NA
Energy Class:	F	F	F	F
Rated Life to L70B50 (Hrs):	30000	30000	30000	30000
Dimensions LxWxH (mm):	30000x10x2	30000x10x2	30000x12x4.5	30000x12x4.5
Weight (kg):	0.6	0.6	2.7	2.7

Separate Control Gear Information

Type of Light Source:	LED	LED	LED	LED
Full Load Efficiency (%):	NA	NA	NA	NA
P _{NET} (W):	NA	NA	NA	NA
Dimensions (mm):	NA	NA	NA	NA

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

VEGAS LONG RUN

4.8W/m, 24V, IP20, IP67

Cone Illuminance Diagram

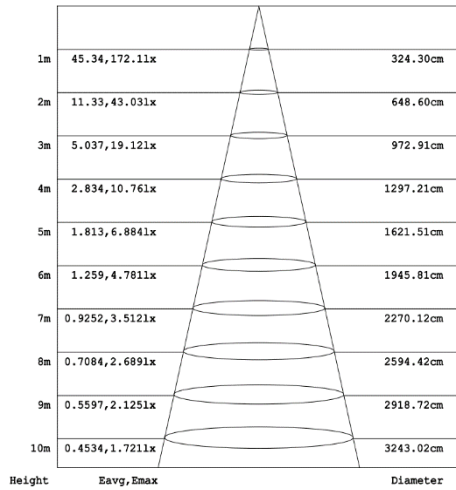


Diagram for RVAL5242030-40 in 4000K. Other diagrams available on request

Polar Intensity Diagram


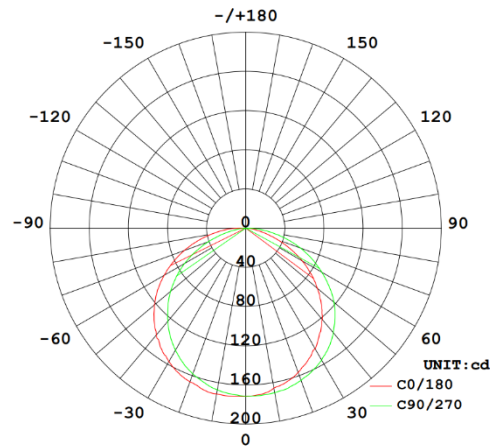


Diagram for RVAL5242030-40 in 4000K. Other diagrams available on request

Dimension Diagram

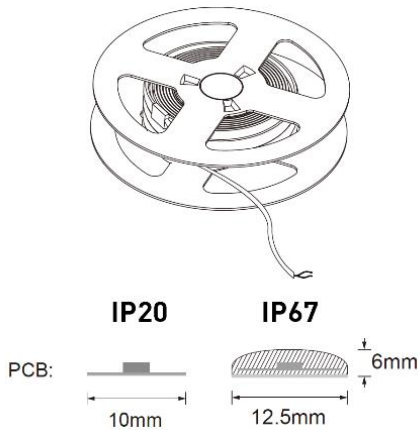

Accessories

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE