


FFD 20/01/056-102

Sealing for flat cable

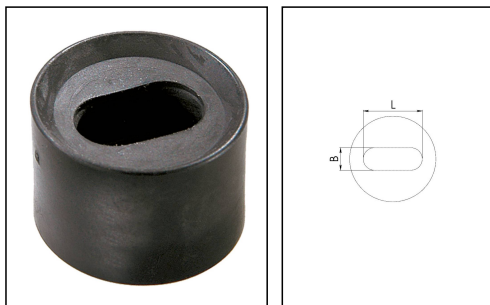

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

SPRINT



Material	Thermoplastic elastomer
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP66
Thickness flat cable B min	4,6 mm
Thickness flat cable B max	5,6 mm
Flat cable width L min	9,7 mm
Flat cable width L max	10,2 mm
Quantity of cable	1
Using for cable gland	SPRINT 20
Product Color	RAL 9005
Order no. RAL 9005	10064322
Type	FFD 20/01/056-102
Packing unit	25
ETIM-Classification	EC000441

13.10.2020


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

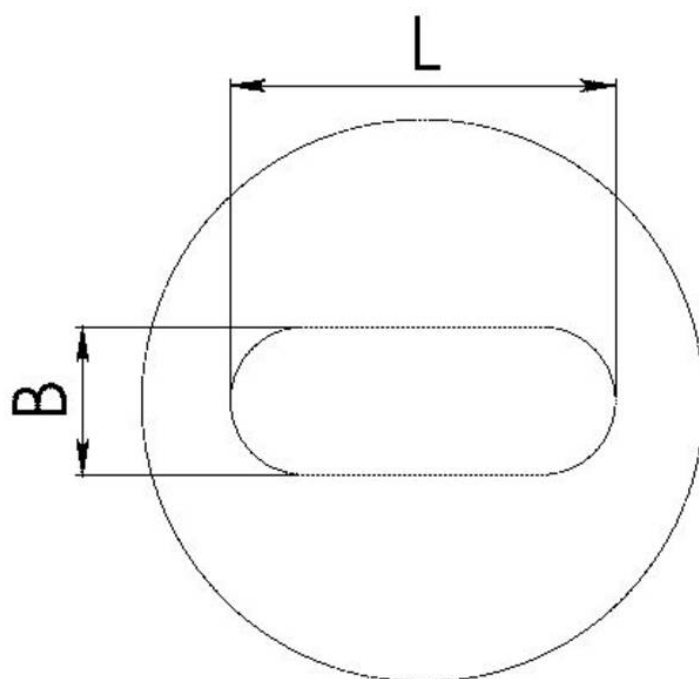

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice