

ILGLSB22DC059



Integral Filament Omni GLS Lamps utilise Filament LED technology to create a decorative look and wide beam angle that looks fantastic in ceiling pendants and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Barcode: 5055788222507

Category: Lamps

Range Name: Omni

Product Type: GLS

Market Segment: Commercial indoor, Residential indoor

Warranty (Years): 2

CE RoHS: Yes

Physical Data

Product Length (mm): 103

Product Width (mm): 60

Product Weight (g): 54

Material: Aluminium, Glass

Base Term: Bayonet cap

Bulb Base: B22

Construction: Glass shell, Filament strip, Aluminium base

Globe Finish: Clear

Globe Type: GLS

Bulb Fixing: Pendant, Wall, lamp stand, table lamp

Bulb or Luminaire Shape: Round

Placement / Application: Indoor, General Lighting

Electrical Data

Power (W): 12

Power Consumption (w): 12

Power Factor: 0.7

Voltage Range (v): 220-240

Wattage equivalent (W): 100

Amperage (mA): 53

Dimming: Dimmable

Driver Included: Yes

Electric Current: AC

Portal.Integral-Led.Com


EN: EN-62560
LVD Certified: Yes

Light Data

Luminous Flux in Lumens (lm): 1521
Luminous efficacy (lm/W): 127
Lumens Range: 1500 to 2000
Correlated Colour Temperature (CCT) (K): 2700
Colour Temperature: 2700K - Warm
Colour Temperature Name: Warm
Beam Angle: 300
Colour Rendering Index (CRI): 80
Compatible Dimmers: Varilight JQP401W
Frequency Range (Hz): 50
Instant on (Less than 1 second): Yes
LED Type: Filament chip
Lifetime (hours): 15000
Switching Cycles: 7500

Environment

EN: EN-62560
LVD Certified: Yes
CE RoHS: Yes
Energy Rating: A++
Hg 0% (Mercury Free): Yes
IP Rating (Ingress Protection): IP20
Lowest Operating Temperature (°C): -20
Maximum Operating Temperature (°C): 40

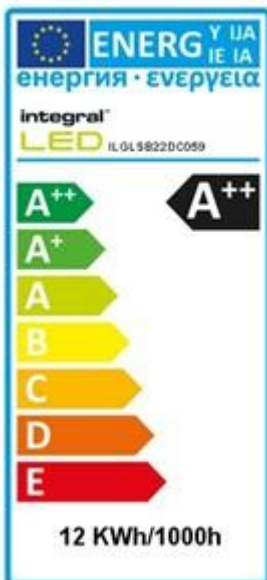

Packaging

Package Weight (g): 110
Package Length (mm): 135
Package Width (mm): 70
Package Depth (mm): 70

Portal.Integral-Led.Com