


100 A  $I_{nA}$  Consumer unit enabling conformity with 18<sup>th</sup> Edition wiring regulations for overload protection of RCCBs and switches, in any single phase residential application regardless of the current rating of the supply authority fuse. Type A RCCDs are provided, these devices can detect AC sinusoidal waveforms and pulsating DC components.



VML918C

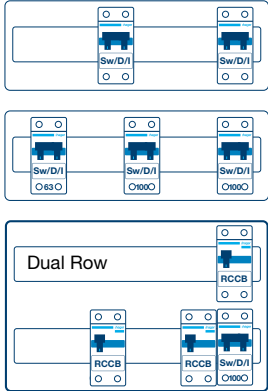

### Multi Tariff


#### Characteristics:

- Metal switch disconnecter incomer consumer units, single row 12 or 18 and dual row 10+14 outgoing ways.
- All Design 10 consumer units contain top, bottom & rear knockouts and a meter tail cable entry plate (**VM04CE**) as standard- see page 4.25 for knockout sizes.
- Supplied with Type A RCCBs, a full metal DIN rail, multiple switch disconnecter incomers and a full complement of earth and neutral terminals along with marking labels, busbar and instructions.
- Conforms to BS EN 61439-3 Including Annex ZB (16kA rating).
- For accessories see page 4.19, for dimensions see page 4.25.

Description	Size	Cat ref.
18 Way Twin Tariff Configurable 2x 100A Switch	7	<b>VML918C</b>
12 Way Multi Tariff 6+5+1 2x100A 1x 63A Switch	6	<b>VML9651</b>
10 Way Split Load 5+5 100A Switch 2x 100A Type A RCCB 1x 100A Type A RCCB Incomer 14 Ways Dual Row	4 (2)	<b>VML955914H</b> ★



VML912TG

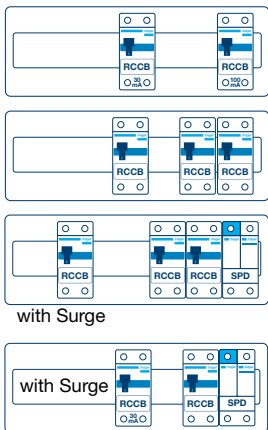

### Time Delayed RCCB Incomer


#### Characteristics:

- Metal RCCB incomer consumer units, single row 12 outgoing ways.
- All Design 10 consumer units contain top, bottom & rear knockouts and a meter tail cable entry plate (**VM04CE**) as standard- see page 4.25 for knockout sizes.
- Supplied with Type A RCCBs, a full metal DIN rail 100A 100mA time delayed incomer and 100A 30mA RCCB incomers and a full complement of earth and neutral terminals along with marking labels, busbar, meter tail clamp and instructions.
- Recommended for use with TT systems (meter tail clamp secures meter tails to prevent accidental disconnection and contact with metal enclosure).
- References ending in **SPD** come with a Type 2 SPD fitted.
- Conforms to BS EN 61439-3 Including Annex ZB (16kA rating).
- For accessories see page 4.19, for dimensions see page 4.25, refer to board sizes below.

Description	Size	Cat ref.
12 Way Configurable 100A 100mA Time Delay Type A RCCB 100A 30mA Type A RCCB	5	<b>VML912TG</b> ★
12 Way 100A 100mA Time Delay Type A RCCB 2x 100A 30mA Type A RCCB	6	<b>VML966TG</b> ★
10 Way 100A 100mA TD + 2 x 100A RCCB with Factory Fitted <b>Surge Protection</b>	6	<b>VML955TGSPD</b> ★
10 Way Configurable 100A 100mA TD RCCB +100A 30mA with Factory Fitted <b>Surge Protection</b>	5	<b>VML910TGSPD</b> ★



VML24AH



### Garage Boards

#### Characteristics:

- Consumer unit comes complete with Type A RCCB, 40A 30mA RCCB Incomer, 32A MCB and 6A MCB, earth & neutral connections, busbar, grommet strip, marking labels & Instructions.
- All Design 10 consumer units contain top, bottom & rear knockouts and a meter tail cable entry plate (**VM04CE**) as standard- see page 4.25 for knockout sizes.
- Cable protector plate for rear knockouts is available as an accessory. (**VM02CE**)
- Conforms to BS EN 61439-3
- For dimensions see page 4.25.

Description	Size	Cat ref.
2 Way 40A 30mA Type A RCCB with 1x 32A & 1x 6A MCB	2	<b>VML24AH</b> ★