


Product Code: OV80122EM

Description: 41W 1200mm Linear Utility LED Light With Emergency - IP65

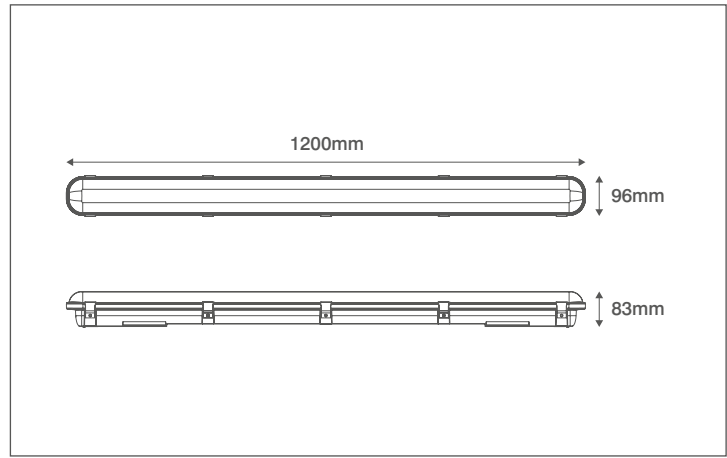

### General Information

Dimensions	1200mm (L) x 96mm (W) x 83mm (D)
Materials	Base: Polycarbonate Frosted Diffuser: Polycarbonate
Base Finish	Light Grey
Product Weight	1.85Kg
Dimmable	No
Ingress Protection	IP65
IK Rating	IK08
Mounting	Ceiling, Wall or Suspended
Warranty	5 Years

### Supply & Power


Input Voltage & Frequency	220-240V ~ 50/60Hz
Electrical Safety	Class I
Input Power	41W
Input Current	205mA
Inrush Current	4A (360ms)
Power Factor	>0.9
Ambient Temperature (Ta)	0°C - +40°C
Critical Temperature	+90°C
Terminations	5 Pole Push Fit Terminal Block
Cable Input Component	20mm IP68 Nylon Gland Supplied
Fixing Components	Surface and Suspension Brackets Supplied

### Accessories

OVEMB6430LIS	6.4V 3000mAh LiFePo4 Serial Battery - Serial
--------------	--

### Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	4680lm
Efficacy	114lm
Beam Angle	105°
LED Lifetime (L70)	50,000 Hours
Fixing Components	Surface and Suspension Brackets Supplied

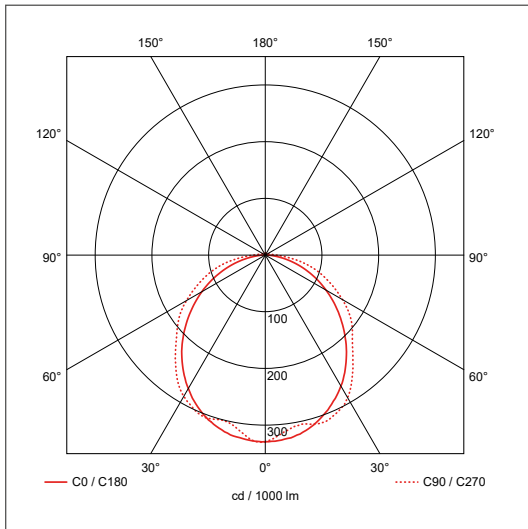

### Emergency Information

Installation Requirements	Can be wired as maintained or non-maintained
Battery Specification	6.4V 3000mAh LiFePo4
Emergency Duration	3 Hours Minimum
Battery Warranty	4 Years
Emergency Light Level	400lm