Fire Fastener

A fire rated push-fit fastener designed for attaching onto a Fast Trak bracket. The fastener is only required to provide a fire rated solution when the bracket is in a 'u' orientation (i.e. channel side up).

PROOF OF THE MATERIAL

Fire Rated – tested to F120 in accordance with BS EN 1363-1:2020 temperature curve

Quick – no tool installation

Simple – push fit-design

Ready-to-use – pre-assembled fastener


Compatible – facilitates the use of the Fast Trak system in fire rated applications

Versatile – fits all bracket lengths of Fast Trak - Standard







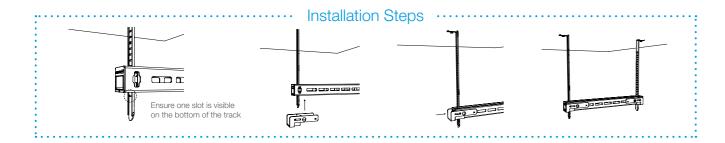

Do not adjust under load. Contact Gripple for full product information, submittal data and technical support.

Excess tracks can also be snapped off once bracket is levelled & secured for a neater finish. Bending tracks by hand is not recommended when excess is under 100 mm.

Mounting Methods



Concrete Screw

Suitable for cracked and non-cracked concrete. Can be removed.



CWS32

Easy-fit screw suitable for wood, non-cracked concrete, precast hollow concrete and hard natural stone



Drop -In Anchor & M10 Screw

Suitable for cracked and non-cracked concrete, precast hollow core concrete and hard natural stone.

Fast Trak Product Codes

Product Codes

Page 9



Product Codes +44 (0) 800 018 4264
Page 9 www.gripple.com

+44 (0) 800 018 4264 www.gripple.com