

## IP44 LED 7W HALF / FULL LANTERNS + 120° PIR

BOTH FITTINGS: Black / 7W / 3100K / 420 lm / 35,000 hrs / IP44 / A Rated




Energy efficient LED alternative to traditional lanterns



- Tough polycarbonate construction
- Time on adjustment 5 secs - 5 mins
- 8 metre detection range
- Lux level adjustments
- 120° detection angle
- M.O.M: 1 / O.P.Q: 10 (Half Lantern)
- M.O.M: 1 / O.P.Q: 4 (Full Lantern)

Standard lanterns available: [PAGE 13](#)

Code	Version
HALFPIRBK	120° PIR Half Lantern
FULLPIRBK	120° PIR Full Lantern

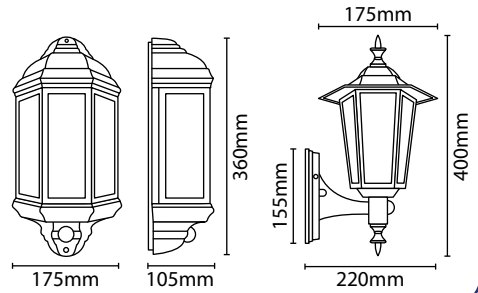


## IP44 LED LANTERNS + 120° PIR

BOTH FITTINGS: 6W / 3100K / 330 lm / 35,000 hrs / IP44 / A Rated



- Time on adjustment: 5 secs - 5 mins
- Lux level adjustments
- 120° detection angle
- 8 metre detection range
- M.O.M: 1 / O.P.Q: 6

Energy efficient, modern design LED lantern offering evenly diffused warm lighting effect.

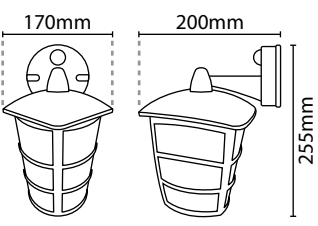

Code	Colour
MODPIRBK	Black
MODPIRWH	White


Standard lanterns available: [PAGE 13](#)

## IP44 EXTERNAL PIR DETECTORS

- ABS construction
- Vertically & horizontally adjustable detector
- 1000W incandescent / 300W fluorescent maximum load capacity
- **Maximum 200W LED load capacity (no more than eight lights)**
- Time on adjustable: 5 sec - 5 min
- Adjustable lux level • 12 metre range
- M.O.M: 1 / O.P.Q: 30





Code	Version	Colour
PIR110BK	110° PIR	Black
PIR110WH		White
PIR180BK	180° PIR	Black
PIR180WH		White

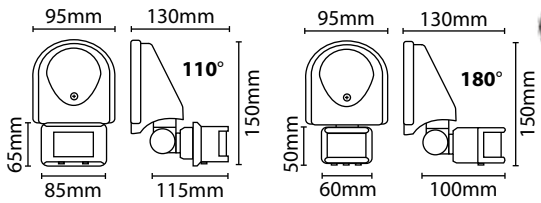

## IP44 EXTERNAL 360° PIR DETECTOR

- ABS construction
- Vertically & horizontally adjustable PIR head
- Bracket included for optional corner mounting: versatile installation options to suit a wide range of requirements
- 1000W incandescent lamp / 300W fluorescent maximum load capacity
- **Maximum 150W LED load capacity (no more than eight lights)**
- Time on adjustable: 5 sec - 5 min • Adjustable lux level
- 12 metre detection area • 360° detection zone
- M.O.M: 1 / O.P.Q: 20

Code
EX360PIRWH

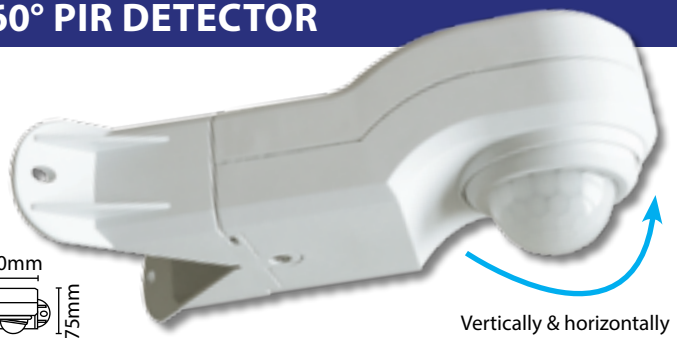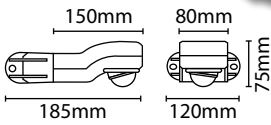

Optional corner bracket included

Vertically & horizontally adjustable PIR head

## IP44 EXTERNAL PHOTOELECTRIC SWITCH

- ABS construction
- Switching level adjustable between approx. 5-300 lux
- 10 Amp resistive, 3 Amp inductive load
- Run back timer adjustable to stay on between 1-8 hours after switch on: flexibility in operation for economic running costs
- **Maximum 250W LED load capacity (no more than ten lights)**
- M.O.M: 1 / O.P.Q: 5

Code
RDT10A

