
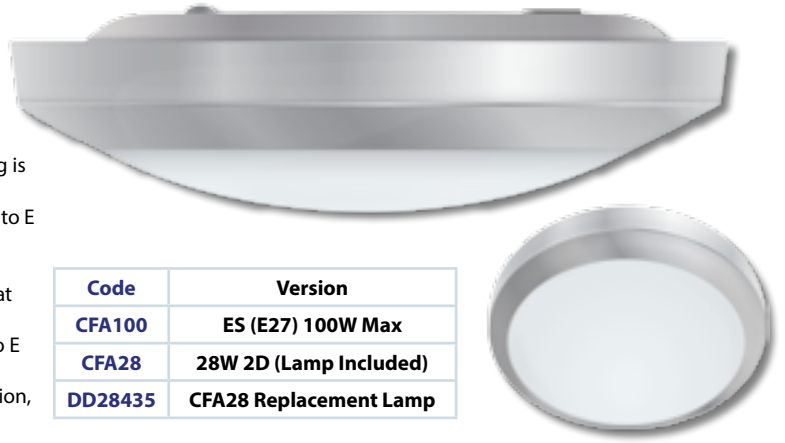


## IP44 CHROME AUREOLA GLASS WALL/CEILING FITTINGS

CFA100 - 100W Max / IP44 • CFA28 - DD LAMP INCLUDED / 28W / 3500K / 2050 lm / 8,000 hrs / IP44 / A Rated

- Pressed steel base • Glass diffuser
- Highly polished chrome effect trim
- Primarily designed for bathrooms
- M.O.M: 1 / O.P.Q: 5



### CFA100 (ES)

- Requires 1 x suitable ES energy saving lamp (not included). Fitting is rated at 100W max
- This luminaire is compatible with bulbs of the energy classes: A++ to E

### CFA28 (2D)


- Requires 1 x 28W GR10q 4 pin DD CFL (included). Fitting is rated at 28W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life

Code	Version
CFA100	ES (E27) 100W Max
CFA28	28W 2D (Lamp Included)
DD28435	CFA28 Replacement Lamp

## IP44 28W 2D WHITE CIRCULAR CEILING FITTING WITH 360° PIR

LAMP INCLUDED / 28W / 3500K / 2050 lm / 8,000 hrs / IP44 / A Rated

- Requires 1 x 28W GR10q 4pin DD CFL lamp (included). Fitting is rated at 28W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Polycarbonate construction
- PIR triggers from last movement: light will not switch off if somebody is in the detection zone
- 360° detection zone: detection distance - 6 metres at 2.5 metres fixing height or 12 metres at 3.5 metres height
- Time adjustable 5 seconds - 8 minutes
- Lux adjustable • Electronic ballast
- M.O.M: 1 / O.P.Q: 5




Code	Version
CF28PIR	Fitting
DD28435	Replacement Lamp

## IP20 60W CIRCULAR FLUORESCENT OPAL CEILING FITTING

LAMP INCLUDED / 60W / 3200K / 3600 lm / 6,000 hrs / IP20 / B Rated

- Requires 1 x 60W G10q T9 circular fluorescent tube (included). Fitting is rated at 60W max
- This luminaire is compatible with bulbs of the energy classes: B to E and is sold with a bulb of the energy class: B
- Pressed steel base • Decoratively etched glass diffuser • Brass effect finial
- Central hole in base plate: can be directly fixed over ceiling rose
- M.O.M: 1 / O.P.Q: 4




Code
D129



## IP20 100W MAX WHITE CERAMIC UPLIGHTER

- Requires 1 x suitable BC energy saving lamp (not included). Fitting is rated at 100W max
- This luminaire is compatible with bulbs of the energy classes: A++ to E
- Plaster body
- Plain ceramic finish: can be painted to match décor
- Pre-wired 300mm mains lead: easy installation
- M.O.M: 1 / O.P.Q: 8




Code
CW3021



CW3021 and GH111/W / GH117/W can also be used with LED lamps see page 55-57

## IP20 WHITE CEILING GLOBE FITTINGS

- Requires 1 x suitable BC lamp (not included).
- **GH111/W:** fitting is rated at 60W max
- **GH117/W:** fitting is rated at 100W max
- This luminaire is compatible with bulbs of the energy classes: A++ to E
- Silicon gasketed globe shade
- Polycarbonate gallery
- Glass globe • Classic design
- M.O.M: 1 / O.P.Q: 12



Code	Version	Wattage
GH111/W	Small	60W Max
GH117/W	Large	100W Max

