



## IP44 14W LOW ENERGY POLISHED CHROME OVER MIRROR LIGHT

LAMP INCLUDED / 14W / 3000K / 1204 lm / 18,000 hrs / IP44 / A Rated

- Requires 1 x 14W G5 T5 549mm fluorescent tube (included). Fitting is rated at 14W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Anodised aluminium body
- Acrylic diffuser • Sleek modern design • Pull cord on/off switch
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life
- Primarily designed for bathrooms, but equally useful for other applications
- M.O.M: 1 / O.P.Q: 12

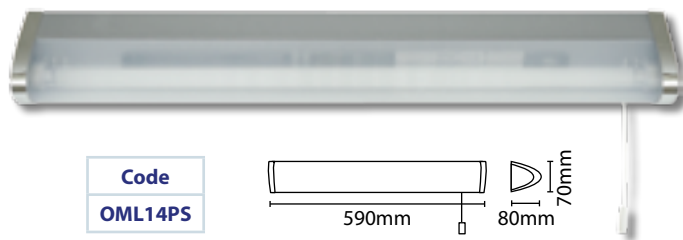


<b>Code</b>
<b>OML14PS</b>



## IP44 18W WHITE LOW ENERGY DUAL VOLTAGE SHAVER LIGHT

LAMP INCLUDED / 18W / 3500K / 1216 lm / 10,000 hrs / IP44 (fitting) / IP21 (socket) / A Rated

- Requires 1 x 18W 2G11 single turn L 4 pin CFL lamp (included). Fitting is rated at 18W max
- Polycarbonate construction
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Safety isolating transformer: for bathroom use
- Permanent power to shaver socket
- Access cover to connection block: easy wiring from the front of the fitting
- Dedicated low energy light source
- Dual voltage shaver socket
- M.O.M: 5 / O.P.Q: 10

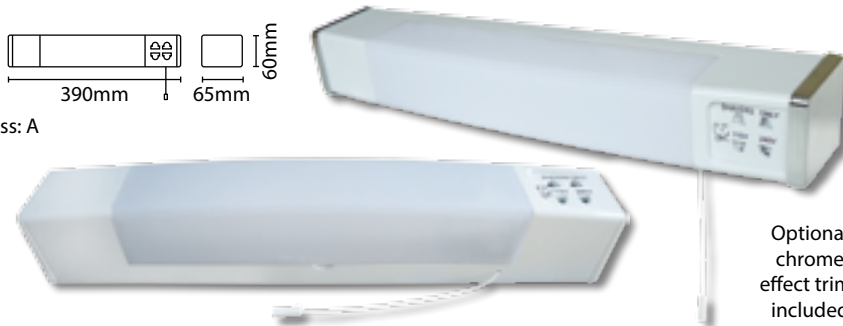

<b>Code</b>
<b>SH1844DVO</b>

Optional chrome effect trims included


## IP44 WHITE MIRROR LIGHT WITH DUAL VOLTAGE SHAVER SOCKET

2 x LAMPS INCLUDED / 2 x 15W / 3000K / 2 x 1010 lm / 15,000 hrs / IP44 / A Rated

- Requires 2 x 15W G13 T8 450mm fluorescent tubes (included). Fitting is rated at 15W max (per lampholder)
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Diffused rectangular light apertures: soft lighting effect
- Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
- Safety isolating transformer on shaver outlet: suitable for bathroom use
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life
- Pull cord on/off switch • Pressed steel base • Glass mirror
- M.O.M: 1 / O.P.Q: 1




<b>Code</b>
<b>ML5040</b>



## IP65 FIRE RATED 50W MAX GU10 SHOWER LIGHTS

- This luminaire is compatible with bulbs of the energy classes: A++ to E
- Requires 1 x 240V GU10 lamp (not included)
- Fittings are rated at 50W max
- 3 way large terminal block with cable restraint for easy installation with ample space for loop in, loop out wiring
- Separately tested for 30, 60 and 90 minute ceiling types to meet standard BS476 Part 21
- Silicon bezel gaskets seal against air permeability
- Hole cut out size: 65mm
- M.O.M: 1 / O.P.Q: 10

Code	Colour
<b>FIREIPCR</b>	<b>Polished Chrome</b>
<b>FIREIPSN</b>	<b>Satin Nickel</b>
<b>FIREIPWH</b>	<b>White</b>



## IP65 MAINS 50W MAX SHOWER LIGHTS

- Requires 1 x GU10 energy saving lamp (not included). Fitting is rated at 50W max
- This luminaire is compatible with bulbs of the energy classes: A++ to E
- Sprung bezel pulls off to facilitate easy lamp change
- Can be used in bathroom zones 1 & 2
- Hole cut out size: 70mm
- Steel construction
- M.O.M: 5 / O.P.Q: 50

Code	Colour
<b>SLGU CR</b>	<b>Polished Chrome</b>
<b>SLGU SN</b>	<b>Brushed Nickel</b>
<b>SLGU WH</b>	<b>White</b>

