


IP20 WHITE LIGHTING CONNECTOR BOXES

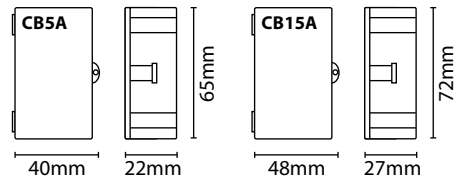


Code	Version
CB5A	5 Amp
CB15A	15 Amp

- Cord restraint at both entries
- **CB5A** = 5 Amp 3 way connector included
- **CB15A** = 15 Amp 3 way connector included
- M.O.M: 20 / O.P.Q: 400


IP20 BLACK 100 AMP POLE CONNECTOR BLOCKS



- Urea housing
- Large and robust construction: ample wiring space
- Terminals accept up to 25mm² conductor: 100 Amp rated
- Provision for security seal
- **CB100SP** = M.O.M: 10 / O.P.Q: 30
- **CB100DP** = M.O.M: 10 / O.P.Q: 20




Code	Version
CB100SP	Single Pole
CB100DP	Double Pole

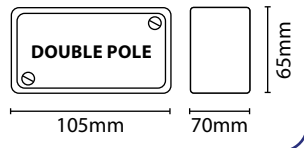

IP20 WHITE PLUG IN CEILING ROSE




Code	Version
CR10	Un-wired
CR10PW	Pre-wired



- Urea construction
- 6 Amp rating 4 terminal
- Shrouded plug terminals and cord grip: complies with 2.2kg load test
- 4 terminals as standard offering extra live connection: ideal for emergency auxiliary use
- BESA box mounting
- **CR10** = M.O.M: 10 / O.P.Q: 180
- **CR10PW** = M.O.M: 10 / O.P.Q: 60


CR10PW
• Pre-wired with 2 metres of heat resistant 4 core flex: time saving, easy installation

IP20 WHITE PUSH TO BREAK AUTOSWITCH




- Momentary push switch: push to break contacts
- Thermoplastic construction
- Switching 1 Amp max (250V)
- M.O.M: 10 / O.P.Q: 600

Code
XS63W

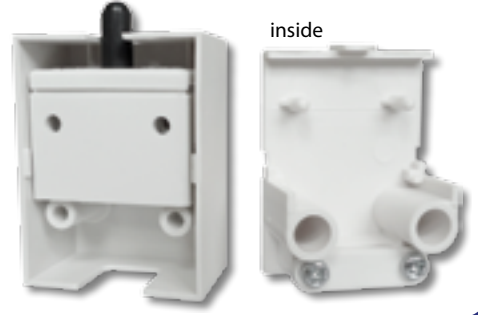

IP68 TRS GLANDS WITH LOCKING NUT

- Glass filled nylon
- Fire retardant to 850°C
- **20mm** accommodates 8-13mm cable
- **25mm** accommodates 12-18mm cable
- Supplied complete with lock nut
- **20mm** = M.O.M: 100 / O.P.Q: 1500
- **25mm** = M.O.M: 20 / O.P.Q: 800

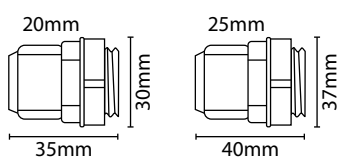

Code	Colour	Hole Ø
20TRSBK	Black	20mm
20TRSG	Grey	
20TRSRE	Red	
20TRSWH	White	
25TRSG	Grey	

