

Emergency LED Non-Maintained Downlights

EMERGENCY

Warranty 120° 30,000 Hours

AVAILABLE FINISHES




COLOUR TEMPERATURE



| CODE       | DESCRIPTION                                 | TRADE (£) |
|------------|---|-----------|
| OVEM7310   | 3W Open Area Downlight - 3 Bezels           | 39.84     |
| OVEM7310ST | 3W Self-Test Open Area Downlight - 3 Bezels | 61.40     |

| PRODUCT INFO   |               |
|----------------|---------------|
| CCT (K)        | 5500K         |
| Lumens         | 130lm         |
| Wattage        | 3W            |
| Beam Angle     | 120°          |
| LED Lifetime   | 30,000 Hours  |
| Voltage        | 220-240V ~    |
| Frequency      | 50/60Hz       |
| Operating Temp | 0°C - +40°C   |
| Cutout         | 35mm Diameter |

REPLACEMENT BATTERY  
**OVEMB3618NCS** 3.6V 1800mAh Ni-Cd Battery - Serial See page 39

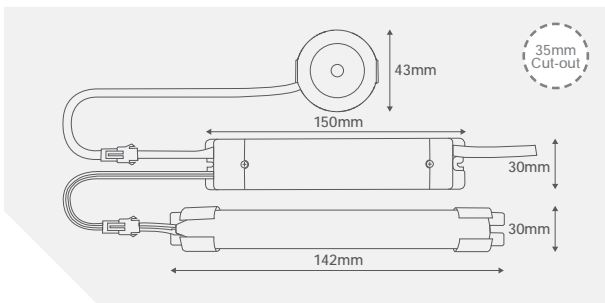

Supplied with Black, White & Silver Bezels

PRODUCT APPROVALS

EN 60598-2-22 BS EN 62034 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547



## Emergency LED Non-Maintained Downlights

### AVAILABLE FINISHES



### COLOUR TEMPERATURE



### PRODUCT INFO

|                |               |
|----------------|---------------|
| CCT (K)        | 5500K         |
| Lumens         | 110lm         |
| Wattage        | 3W            |
| Beam Angle     | 135°          |
| LED Lifetime   | 30,000 Hours  |
| Voltage        | 220-240V~     |
| Frequency      | 50/60Hz       |
| Operating Temp | 0°C - +40°C   |
| Cutout         | 35mm Diameter |

### CODE

### DESCRIPTION


### TRADE (€)

|                   |   |       |
|-------------------|---|-------|
| <b>OVEM8310</b>   | 3W Corridor Downlight - White           | 39.84 |
| <b>OVEM8310ST</b> | 3W Self-Test Corridor Downlight - White | 61.42 |

### REPLACEMENT BATTERY

**OVEMB3618NCS** 3.6V 1800mAh Ni-Cd Battery - Serial

See page 39

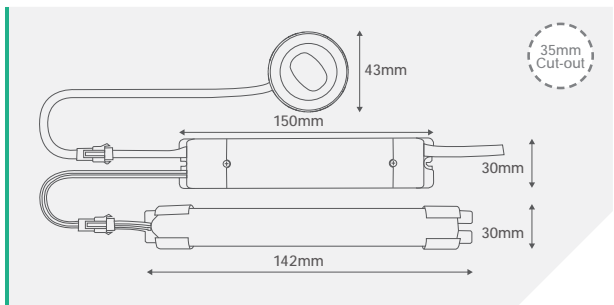

### PRODUCT APPROVALS

EN 60598-2-22 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547




Emergency LED Non-Maintained Downlights

EMERGENCY

30

AVAILABLE FINISHES

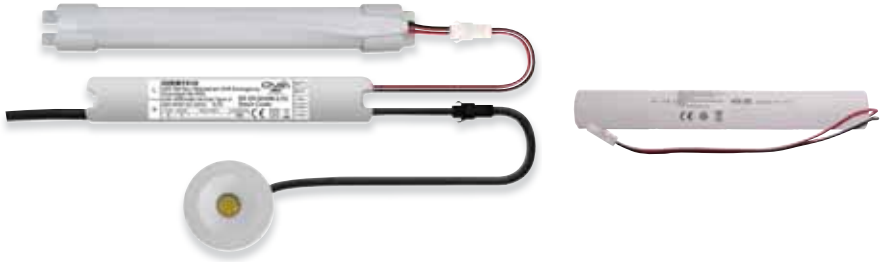


COLOUR TEMPERATURE



| CODE       | DESCRIPTION                              | TRADE (£) | PRODUCT INFO  |
|------------|--|-----------|---------------|
| OVEM7510   | 5W Open Area Downlight - White           | 61.72     | CCT (K) 5500K |
| OVEM7510ST | 5W Self-Test Open Area Downlight - White | 83.28     | Lumens 250lm  |

| REPLACEMENT BATTERY |  |
|---------------------|--|
| OVEMB4835NCS        | 4.8V 3500mAh Ni-Cd Battery - Serial <span style="float: right;">See page 39</span> |

|                |               |
|----------------|---------------|
| Wattage        | 5W            |
| Beam Angle     | 120°          |
| LED Lifetime   | 30,000 Hours  |
| Voltage        | 220-240V~     |
| Frequency      | 50/60Hz       |
| Operating Temp | 0°C - +40°C   |
| Cutout         | 48mm Diameter |

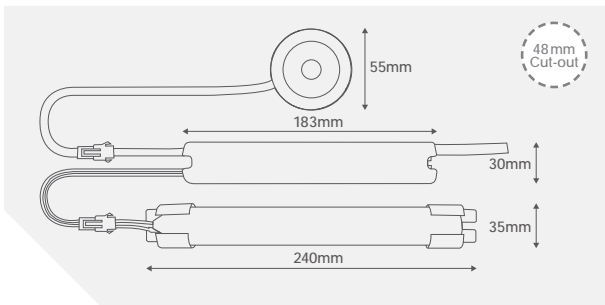

PRODUCT APPROVALS

EN 60598-2-22 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

