

Emergency LED Maintained Box Exit Sign

EMERGENCY

Warranty 120° 50,000 Hours

AVAILABLE FINISHES




COLOUR TEMPERATURE



CODE	DESCRIPTION	TRADE (£)	PRODUCT INFO
OVEM11311WHD	3W Exit Sign - White - Down	46.72	CCT (K) 6500K
OVEM11311WHL	3W Exit Sign - White - Left	46.72	Lumens (Mains) 45lm
OVEM11311WHR	3W Exit Sign - White - Right	46.72	Lumens (Emergency) 34lm
OVEM11311WHU	3W Exit Sign - White - Up	46.72	Wattage 3W

REPLACEMENT BATTERY

OVEMB3608NCP 3.6V 800mAh Ni-Cd Battery - Parallel See page 38

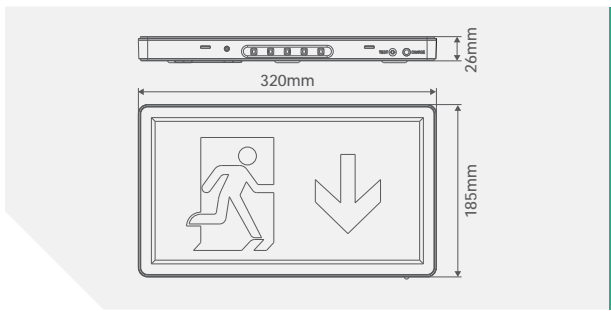

Beam Angle	120°
LED Lifetime	50,000 Hours
Voltage	220-240V ~
Frequency	50/60Hz
Operating Temp	0°C - +40°C
Viewing Distance	29 Metres

With Down Illumination

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-22 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547



Emergency LED Self-Test Maintained Box Exit Sign

AVAILABLE FINISHES



COLOUR TEMPERATURE



PRODUCT INFO

CCT (K)	6500K
Lumens (Mains)	45lm
Lumens (Emergency)	34lm
Wattage	3W
Beam Angle	120°
LED Lifetime	50,000 Hours
Voltage	220-240V~
Frequency	50/60Hz
Operating Temp	0°C - +40°C
Viewing Distance	29 Metres

CODE


DESCRIPTION

TRADE (£)

OVEM11311WHDST	3W Self-Test Exit Sign - White - Down	68.28
OVEM11311WHLST	3W Self-Test Exit Sign - White - Left	68.28
OVEM11311WHRST	3W Self-Test Exit Sign - White - Right	68.28
OVEM11311WHUST	3W Self-Test Exit Sign - White - Up	68.28

REPLACEMENT BATTERY

OVEMB3608NCP	3.6V 800mAh Ni-Cd Battery - Parallel	See page 38
--------------	--------------------------------------	-------------

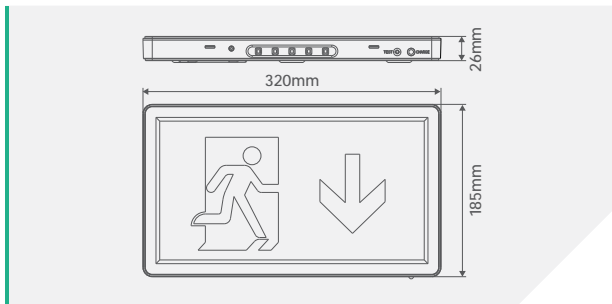

PRODUCT APPROVALS

With Down Illumination

EN 60598-1 EN 60598-2-22 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

