

## Saletto (LPPE)



## Product Description

Sleek, clean look, low-profile panel heater allowing the programming of multiple 7-day timer profiles via a backlit LCD display and capacitive buttons


## Key Features

- Sleek designer panel with upwards facing grille for optimum heat circulation
- Intuitive user controls with RGB backlit LCD display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within 0.2°C
- Energy-saving technologies such as Adaptive Start and Open Window Detection
- Aesthetics to compliment storage heater ranges
- Splash proof for use in bathrooms
- Complies with Lot 20 of ERP Directive

## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ) <b>Timer modes:</b> 7 Day Programmable User Timer, Out All Day, Home All Day, Holiday <b>Continuous heat modes:</b> Eco, Manual, Frost Protect, Setback, Runback, Off
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>• Graphical display with RGB backlight</li> <li>• Capacitive buttons with audio feedback</li> <li>• User replaceable battery (Coin-Type)</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>• Open window detection, Adaptive-start, Advance time period</li> <li>• Adjustable max SP range (<math>7-32^{\circ}\text{C}</math>)</li> <li>• Bluetooth for software updates</li> <li>• Child Lock &amp; Landlord Lock (PIN-based)</li> </ul>
<b>Construction</b>	Durable epoxy-polyester powder coated steel casing with louvered upward facing grille Advanced controls with cap-sense technology for total flexibility of heating
<b>Element</b>	Compact, finned, mineral filled sheathed element
<b>Installation</b>	1 H-frame wall bracket for easy fixing
<b>Safety</b>	<ul style="list-style-type: none"> <li>• Thermal cut-out. Auto reset type</li> <li>• Overheat detection</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	3.3V coin cell battery to backup real time clock. Battery life > 5 years.
<b>Supply</b>	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
<b>Colour / Finish</b>	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

## Dimensions

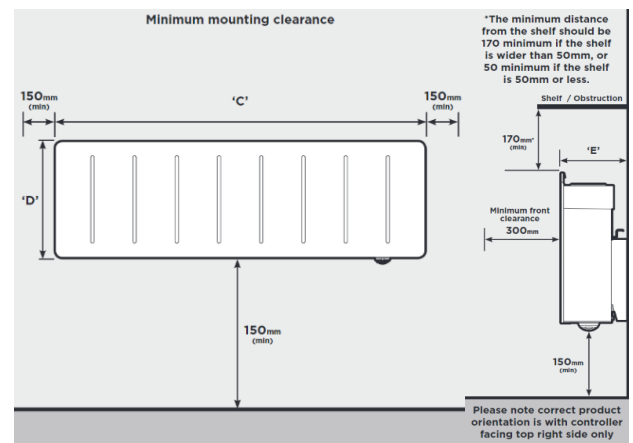

Model/Item No. (EAN-Code 5011139+Item No.)	091246	LPPO50E 091239	LPPO75E 091253	LPPI00E 091260	LPPI50E
Output (kW)	0.50	0.75	1.00	1.50	
Height 'D' (mm)	235	235	235	235	
Width 'C' (mm)	746	736	877	1142	
Depth 'E' (mm)	100	100	100	100	
Weight (Kg)	6.7	6.7	7.6	9.9	
<b>Packaging Details</b>					
Height (mm)	364	320	360	365	
Width (mm)	800	720	930	1195	
Depth (mm)	175	160	170	177	
Packed Weight (Kg)	7.2	7	7.8	10	
Ti	7	7	6	5	
Hi	5	5	5	4	
Pallet Quantity (2.4m high)	35	35	30	20	

## Warranty & Approvals

<b>Approvals</b>	CE, BEAB
<b>Warranty</b>	2 Years
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Glen Dimplex Heating & Ventilation (GDC Group Ltd)