

Hamilton[®] Technical Specification

DUAL VOLTAGE SHAVER SOCKET

CATEGORY:

SHAVER SOCKET

Technical Insert Ref: Description:

SHS Shaver Dual Voltage Unswitched Socket (Vertically Mounted)

TECHNICAL SPECIFICATION:

Current Rating: 20VA
Voltage: 220/250V AC
Max Load Output: 115/230V
Max Load Input: 200/250V
IP Rating: IP2XD
Switched Poles: None
Contact Gap Minimum: None
Product Class 1: Must be earthed
Ambient Operating Temperature: -5 to +40 C
Location: Internal Use Only

Max Installation Altitude: 2000m
Shuttered: Yes
Box Depth: 47mm

Standard Hamilton manufactured electrical accessories are designed to be mounted on BS4662:2006 flush wall boxes.

STANDARDS:


BS EN ISO Standard: BS EN 61558
 BS 4573

TERMINAL CAPACITY:


	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	5	4	3	2	1
Earth Terminal Capacity	9	6	4	2	1

Fixing Centres: SHAVER SOCKET

120.6mm
Vertically mounted



SHS

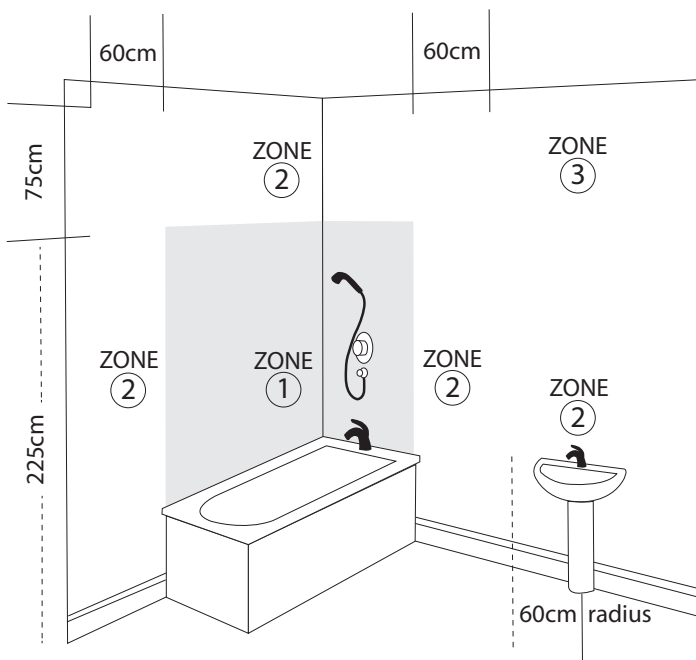

Bathroom Safety

Note: Generally, shaver sockets won't have an IP (ingress protection) rating, but if they comply with BS EN 61558 they can safely be installed in zone 2 - as long as they are away from the bath or shower unit and are unlikely to come into contact with shower spray.