


## Item Image




## Wiring

### 2 Way and Intermediate Switching Wiring Methods

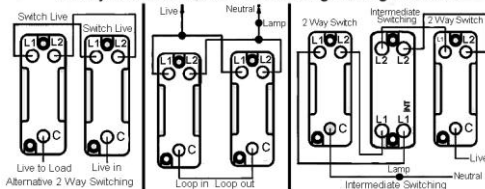

## Dimensions

### Hamilton® CHERITON VICTORIAN 3 GANG 2 WAY 10AX ROCKER SWITCH



## 96 R23 SC-B

Cheriton Victorian Satin Chrome 3 gang 2 Way 10AX Rocker. Standard Insert will be Satin Chrome with a Black surround.

Primary Range	Cheriton Victorian
Insert Type	2 Way Rocker Switches
Plate Finish	Satin Chrome
Frame Finish	
Switch Colour	Satin Chrome
Body & Switch Trim	Black
Height	Single = 88mm
Width	Single = 88mm
Depth	Single = 8.5mm
Fixing Hole Centres	Box Fixing = 60.3mm Box Fixing = 60.3mm
Minimum Wall Box Depth	25mm
Wattage	
Switched Poles	Single
Current Rating	10AX
Voltage	220/250V AC
Max load	10 Amp inductive
Contact Gap Minimum	3mm
Terminal Capacity 1	5 x 1mm <sup>2</sup>
Terminal Capacity 2	4 x 1.5mm <sup>2</sup>
Terminal Capacity 3	1 x 2.5mm <sup>2</sup>
Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Strand
Terminal Capacity 5	1 x 6mm <sup>2</sup>
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40° C
Recommended Location	Indoor use only
Standard/Approval	BS EN 60669-1
Patents and Trademarks	Trade Mark No. 2344779

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.

It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

Correct as at August 2012  
E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK  
T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com  
www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary)  
Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire  
Registered in London No. 941624 • VAT Registration No. 222 6607 84



BS EN ISO 9001:2008  
CERT. No. FM11238

