


# Technical Specification

**Product Code:** VPCH205WH

**Description:** 45A 2 Gang Double Pole Switch With 13A Double Pole Switched Socket Outlet & Neons

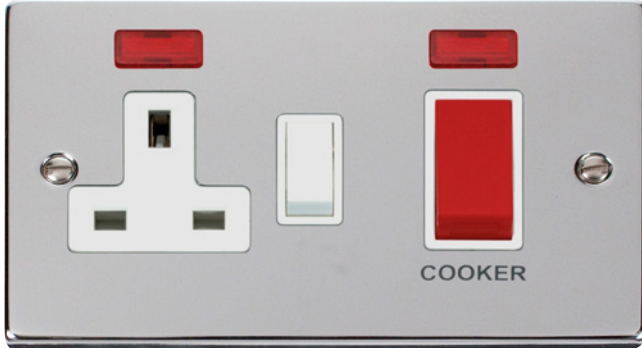


Representative Image

## General Information


|                                   |   |
|-----------------------------------|---|
| <b>Dimensions</b>                 | 146mm (W) x 88mm (H) x 8mm (D)  |
| <b>Dimensions With Gasket</b>     | 149mm (W) x 91mm (H) x 9mm (D)  |
| <b>Plate Design &amp; Finish</b>  | Victorian Polished Chrome   |
| <b>Insert &amp; Gasket Colour</b> | White   |
| <b>Materials</b>                  | Front Plate: Stainless Steel<br>Insert, Switch & Rear Housing: Urea<br>Neon Lens: Polycarbonate<br>Terminals: Brass<br>Terminal Screws: Steel & Yellow Passivated<br>Contacts: Silver "on-lay" Copper / Brass<br>Internal Busbars: Formed Pressed Brass<br>Earth Strap: Mild Steel<br>Gasket: Nylon |
| <b>Maximum Voltage</b>            | 250V~ 50Hz  |
| <b>Load Rating</b>                | 45A   |
| <b>Plate Fixing Centres</b>       | 120.6mm   |
| <b>Terminal Size</b>              | 6mmø  |
| <b>Terminal Torque</b>            | 2.5Nm   |
| <b>Terminal Capacity</b>          | 1 x 16mm <sup>2</sup>   |
| <b>Double Pole</b>                | Yes   |
| <b>Twin Earth Terminals</b>       | Yes   |
| <b>Neon Indicator</b>             | Yes (Red)   |
| <b>Ingress Protection</b>         | IP20  |
| <b>Back Box Depth</b>             | 35mm Minimum  |
| <b>Operational Temperature</b>    | -5°C to +40°C   |
| <b>Warranty</b>                   | 10 Years  |
| <b>Standards</b>                  | BS 4177:1992  |

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.




SCP322BS




SCP322CH



SCP322SS



SCP322BK



SCP322PW